




DESCRIPTION:

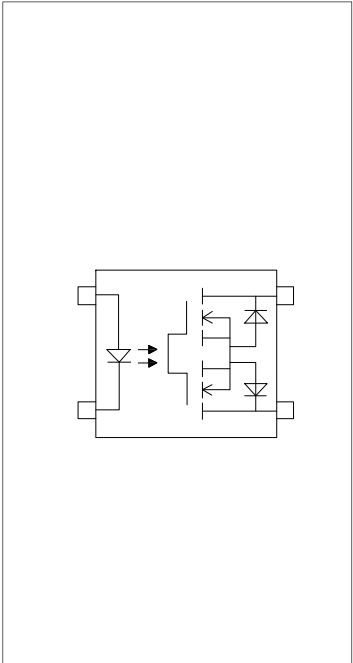

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS



--	--	--	--

NOTE1 : 100 μ s pulse, 100Hz frequency

NOTE2 : AC for 1minute, R.H.=40~60%







ELECTRICAL CHARACTERISTICS



Recommended Operating Conditions

				16	





Characteristics Curves

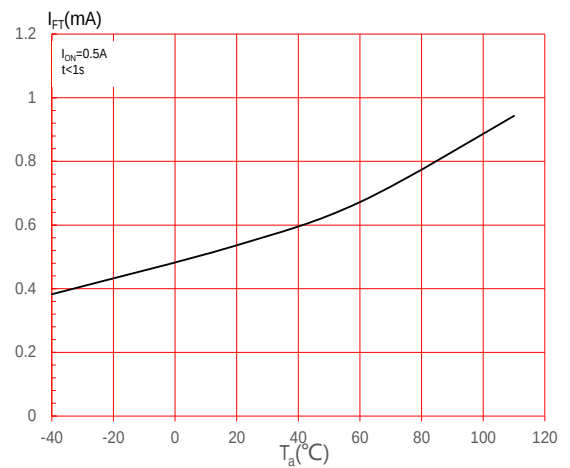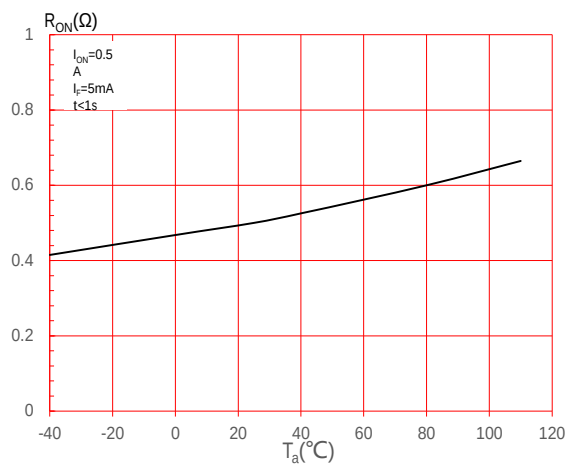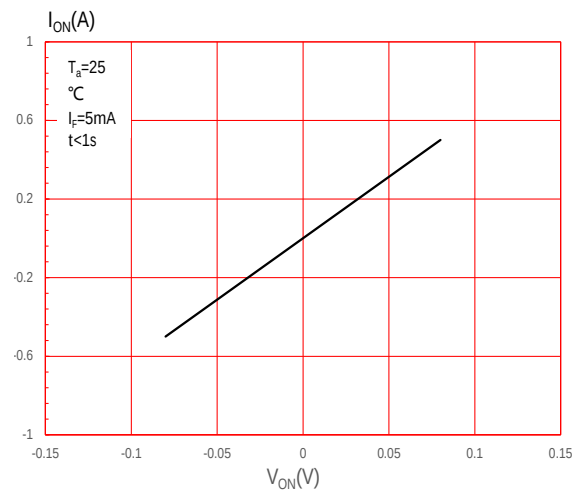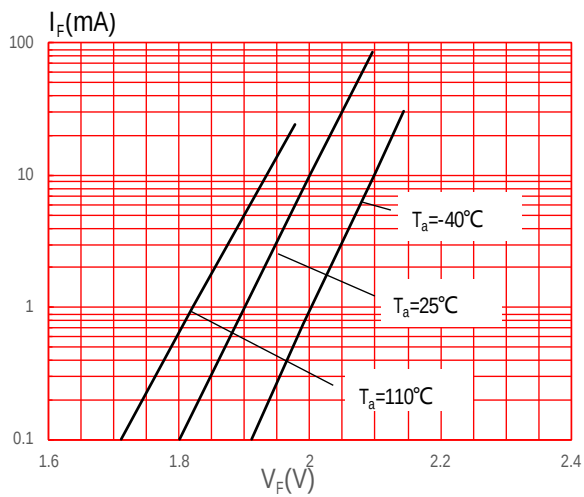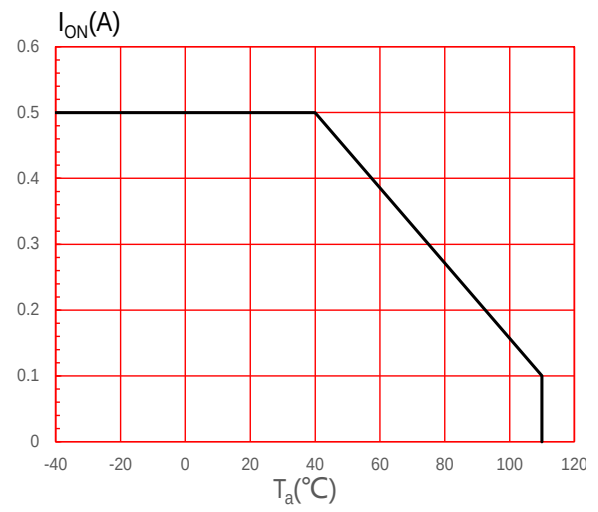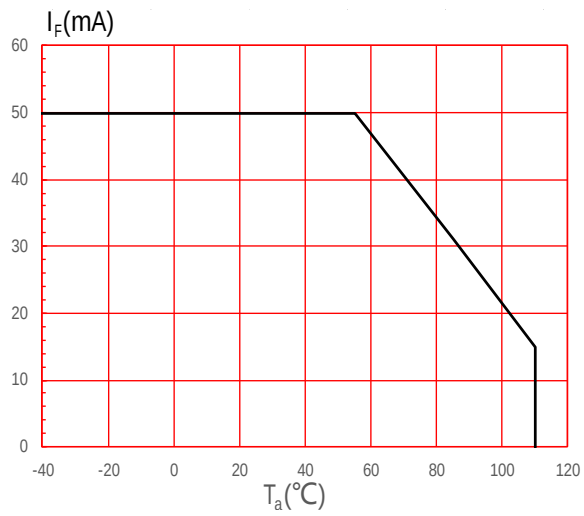


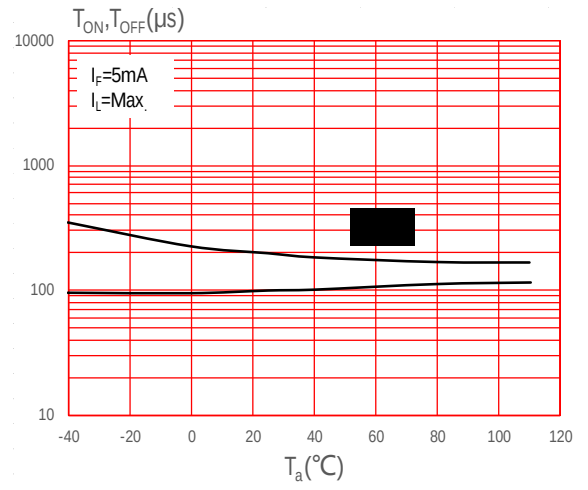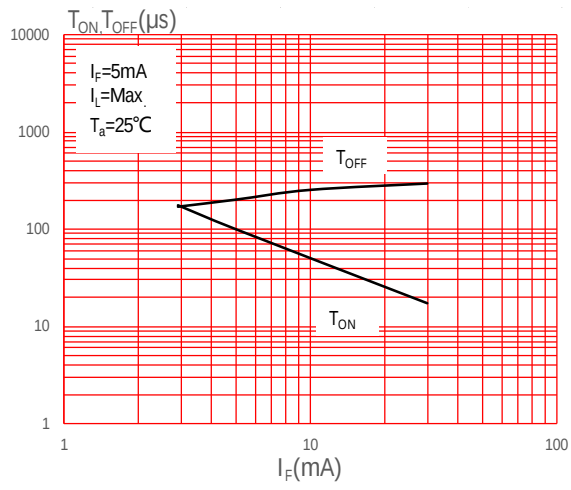

Package Dimension (Unit: mm)

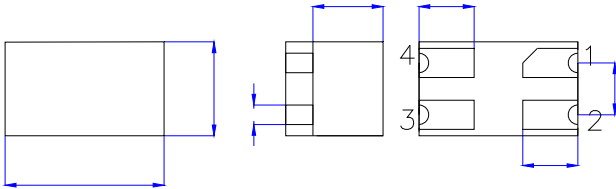
[illegible]

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

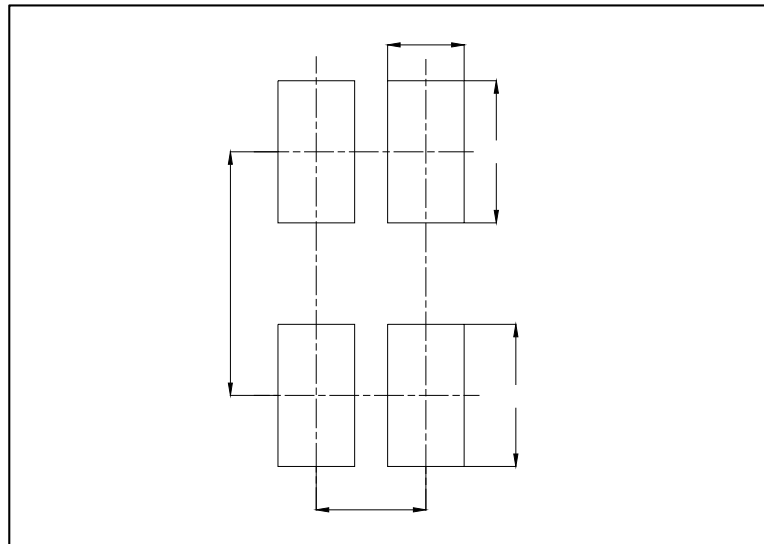



CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

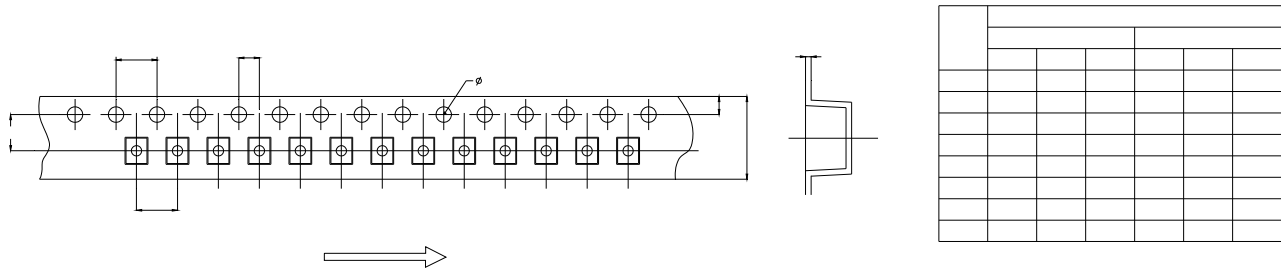

REFLOW INFORMATION

