




to 110

REACH & RoHS compliance
HBM: H3A ; MM: M4

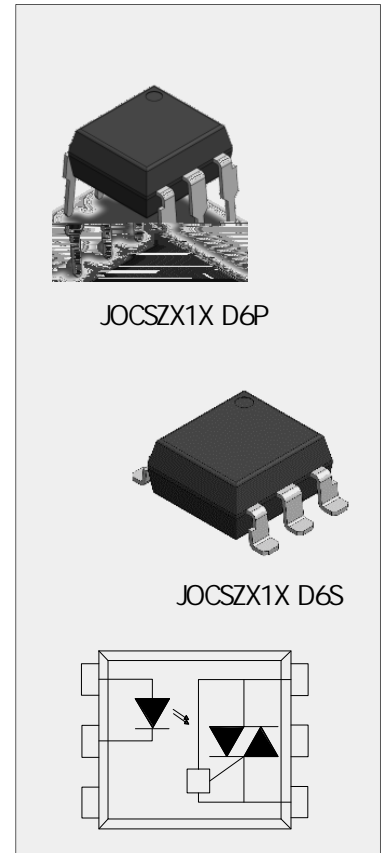

Parameter		Symbol		Value	Unit

: 100 s pulse, 100Hz frequency

: AC for 1minute, R.H.=40~60%

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

: Test voltage must be applied within dV/dt ratings

: Refer to Fig.14 & Fig.15

FIG.1:

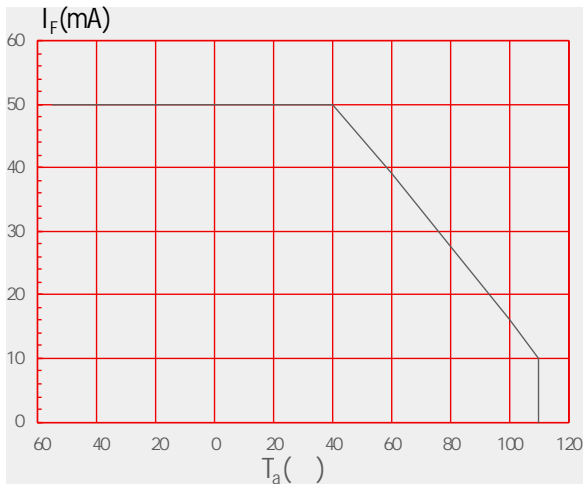


FIG.2:

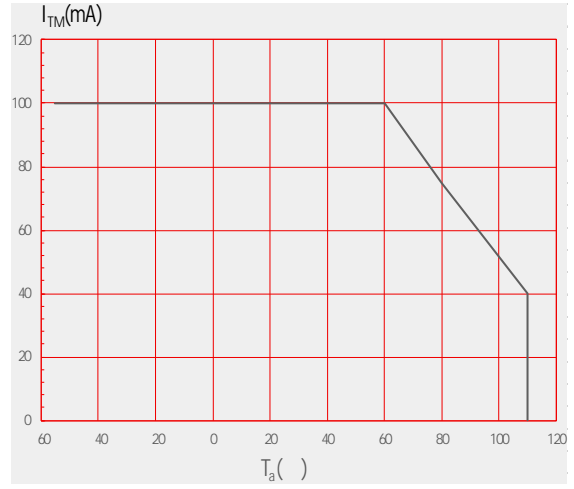


FIG.3:

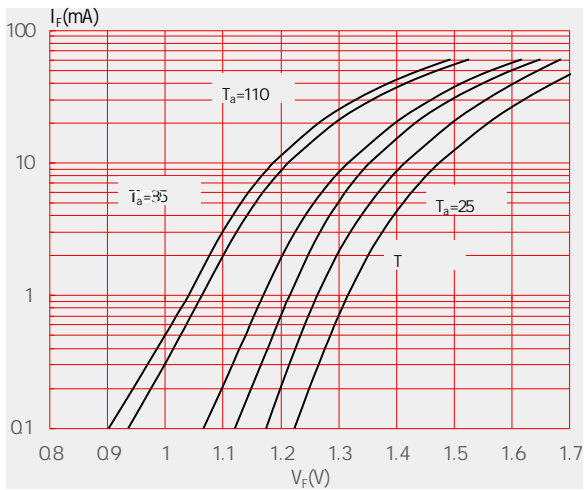


FIG.4:

FIG.7:

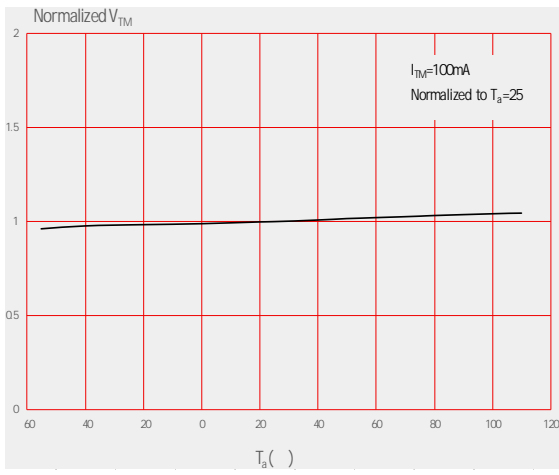


FIG.8:

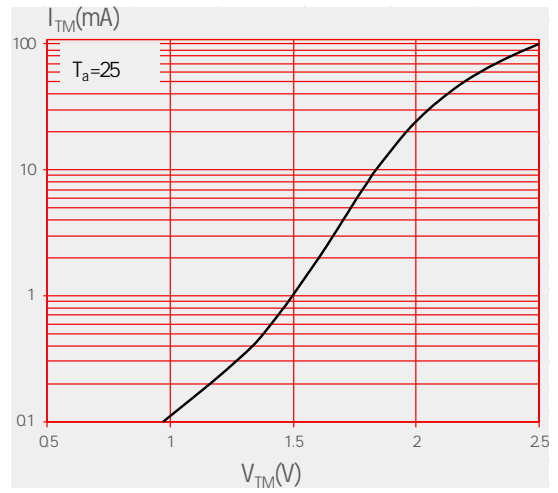


FIG.9:




FIG.10:



FIG.12:

FIG.13:

Fig.14: Test Circuits of dV/dt

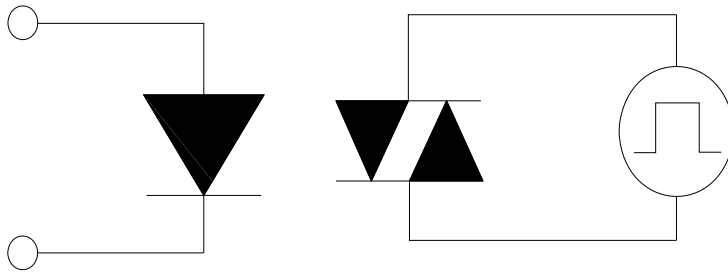


Fig.15: Waveforms of dV/dt



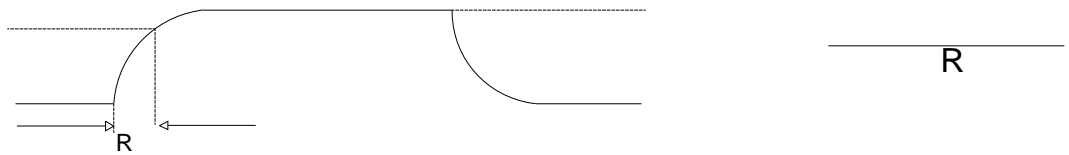



FIG.16:

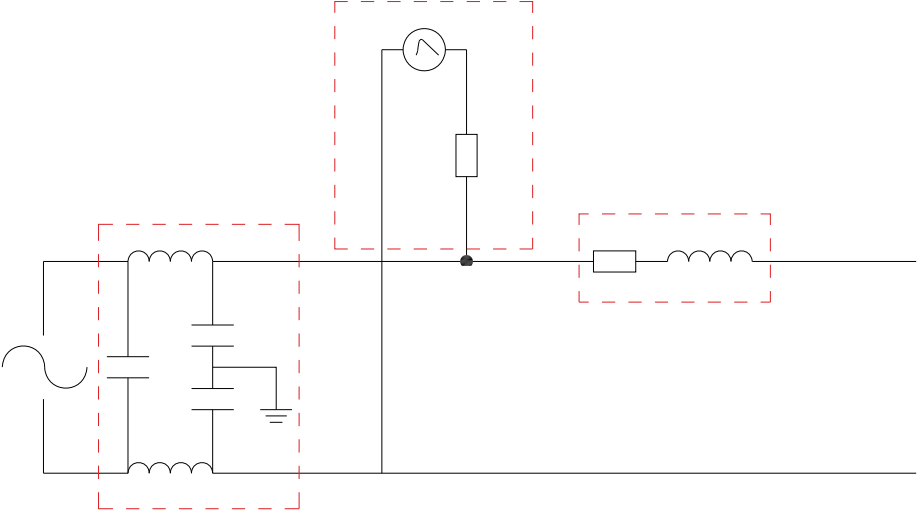

Option SMD Type:

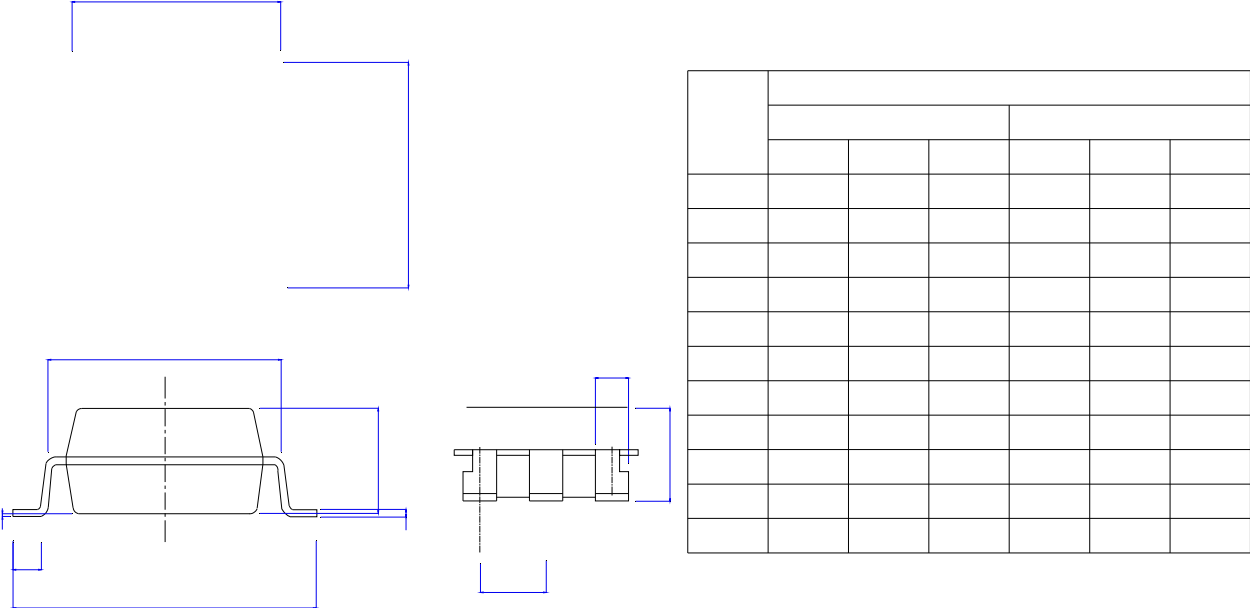

Standard DIP

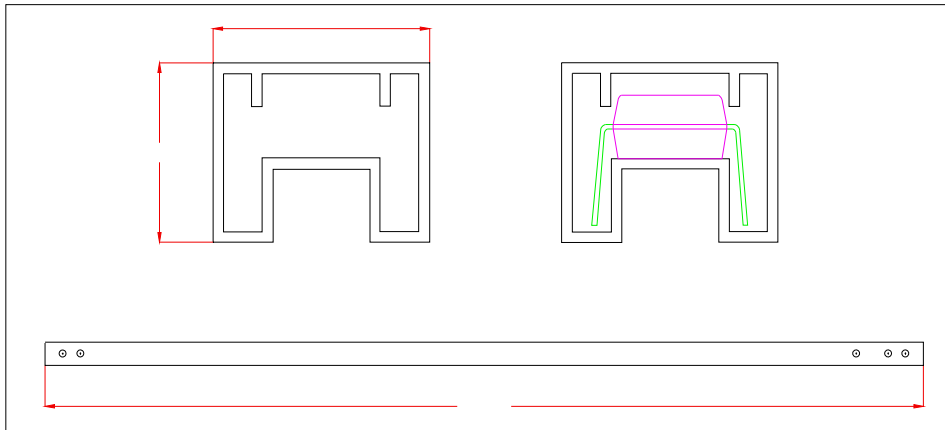

Option S/L

