



JOC SZ21X-M4, JOC SZ31X-M4 Series

Rev.A.1.0

The products are 4-pin thyristor opto-couplers. The device combines an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon zero-crossing photo triac in a plastic SOP4 package. The products are widely used in solenoid/valve controls, lighting controls, motor controls, temperature controls, static AC power switches, solid state relays, interfacing microprocessors up to 265 V<sub>AC</sub> peripherals.

High isolation 3750 VRMS

DC input with zero-crossing photo triac output

Operating temperature range -55 to 110

REACH & RoHS compliance

HBM:                    : = ÷                    M                    M                    M H Ri ä urocM


Operating Temperature	$T_{opr}$	-55~110	
Junction Temperature	$T_j$	125	
Storage Temperature	$T_{stg}$	-55~125	
Soldering Temperature	$T_{sol}$	260	
Peak pulse voltage ( $T_j=25$ ; non-repetitive,off-state)	$V_{pp}$	1	kV


:  $\mu$  :

(Temperature=25°C)


Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	$V_F$	$I_F=10mA$	-	1.2	1.5	V
	Reverse Current	$I_R$	$V_R=6V$	-	-	1	$\mu A$
	Input Capacitance	$C_{in}$	$V=0, f=1kHz$	-	10	-	pF
Output	Peak Off-state Current, Either Direction	$I_{OFF}$	$V_{OFF}=Rated V_{OFF}$ $I_F=0$	-	-	100	nA
	Peak On-state Voltage, Either Direction	$V_{TM}$	$I_{TM}=100mA$	-	1.8	2.5	V
	Critical Rate of Rise of Off-state voltage	dV/dt	$V_{PEAK}= Rated V_{PEAK}$ $I_F=0$	2000	-	-	V/ $\mu s$
Transfer Characteristics	LED Trigger Current	JOCSZ21A JOCSZ31A	Terminal Voltage=3V $I_{TM}=100mA$	-	-	10	mA
		JOCSZ21B JOCSZ31B		-	-	5	
		JOCSZ21C JOCSZ31C		-	-	3	
	Holding Current	$I_H$	$I_{TM}=2mA,$ $I_F=Rated I_{FT}$	-	500	-	$\mu A$
	Isolation Resistance	$R_{ISO}$	DC500V 40~60%R.H.	$10^{12}$	$10^{14}$	-	
	Floating Capacitance	$C_{IO}$	$V=0,$ $f=1MHz$	-	5	-	pF
	Response Time	$t_{on}$	$V_D=6V,$ $R_L=100$ , $I_F=20mA$	-	15	50	$\mu s$
Zero-Crossing Characteristics	Inhibit Voltage	$V_{IH}$	$I_F=Rated I_{FT}$	-	-	20	V
	Leakage in Inhibited State	$I_{OFF2}$	$I_F=Rated I_{FT}$ $V_{OFF}=Rated V_{OFF}$	-	-	5	mA

: :

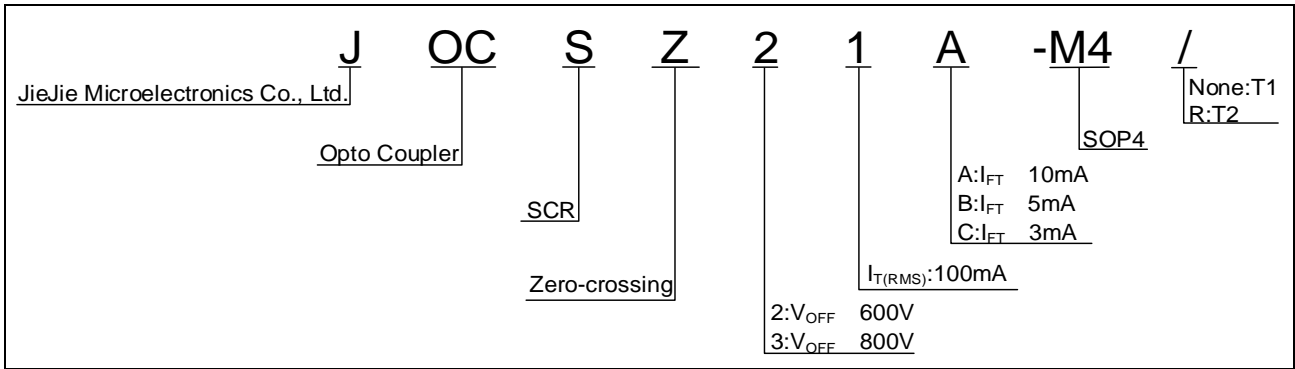


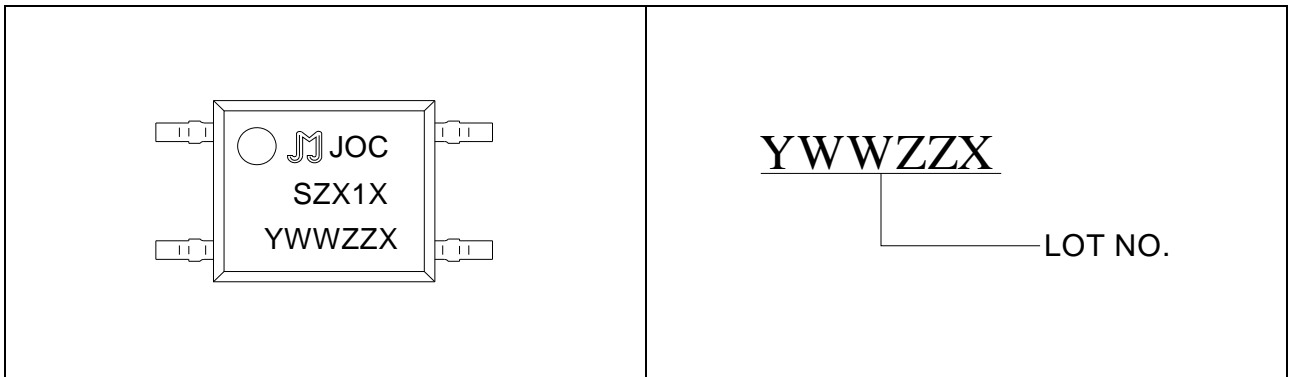
**FIG.1:** Max. Allowable LED Forward Current vs. Ambient Temperature

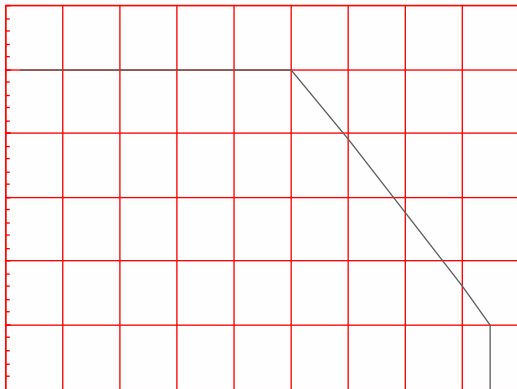


**FIG.2:** On-state Terminal Current vs. Ambient Temperature

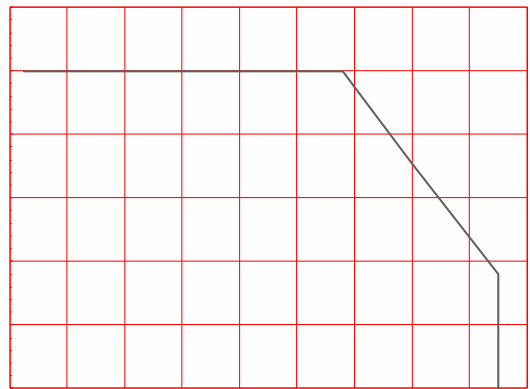


**FIG.3:** Forward Current vs. Forward Voltage

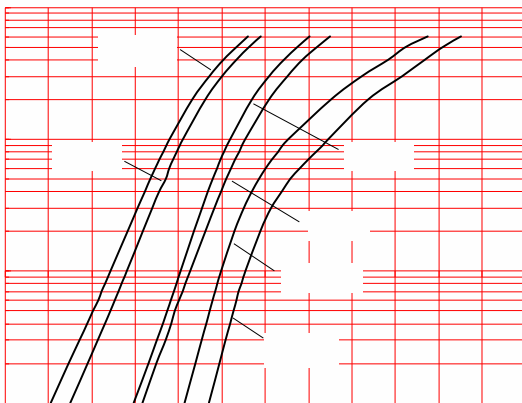


**FIG.4:** Normalized Off-state Terminal Current vs. Ambient Temperature

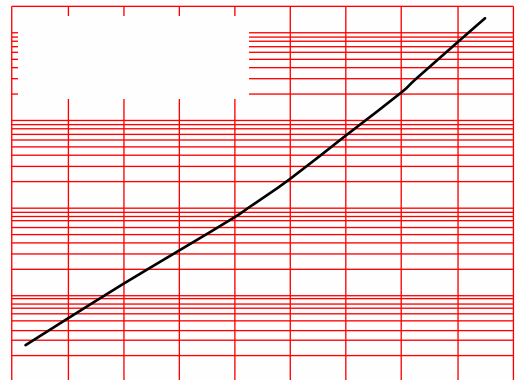


**FIG.7:** Normalized On-state Terminal Voltage vs. Ambient Temperature

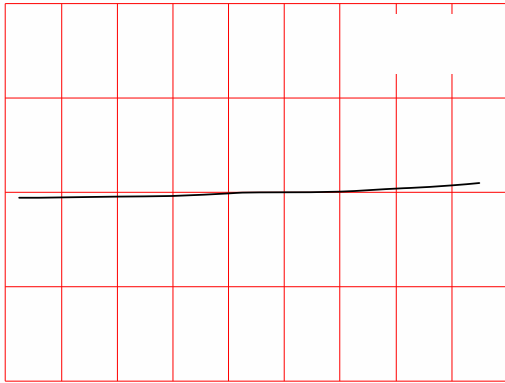

**FIG.8:** On-state Terminal Voltage vs. On-state Terminal Current

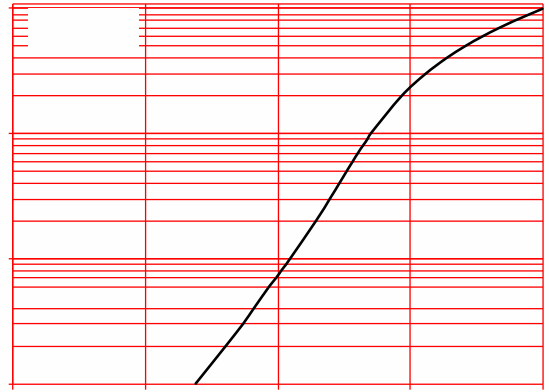

**FIG.9:** Normalized Holding Current vs. Ambient Temperature

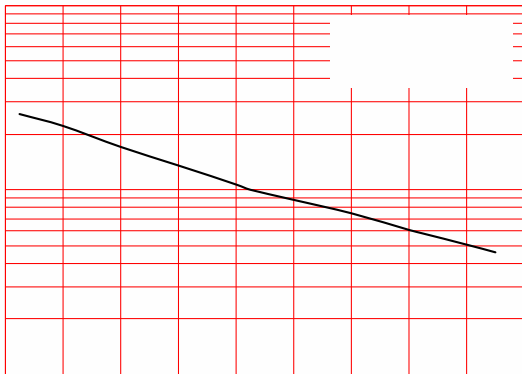

**FIG.10:** Normalized Leakage in Inhibit State vs. Ambient Temperature

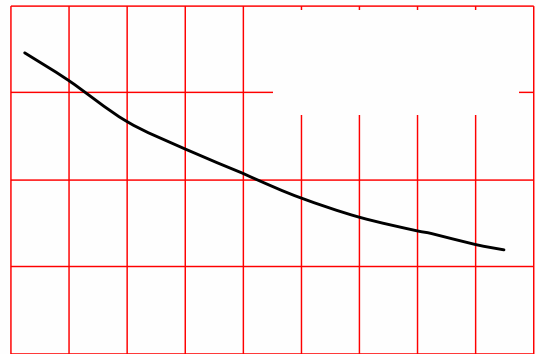



FIG.12: Test Circuits of Turn On Time



FIG.13: Waveforms of Turn On Time

Fig.14: Test Circuits of dV/dt




FIG.16: Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

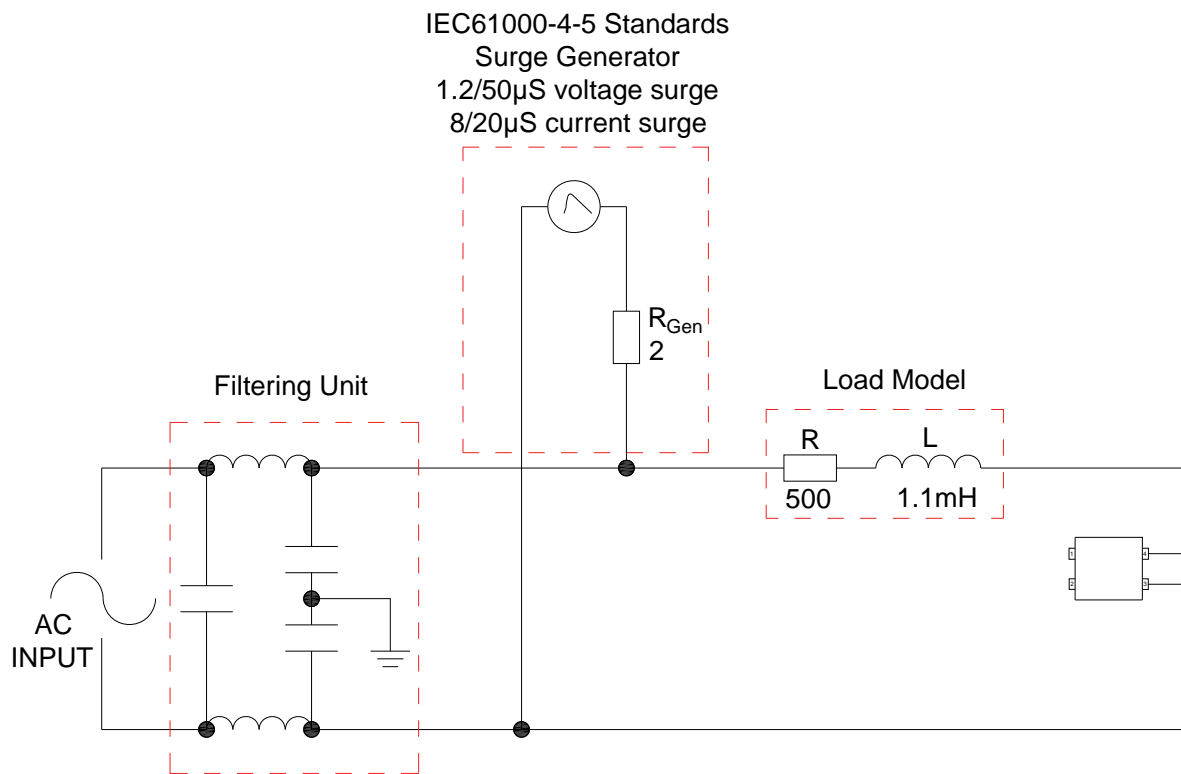

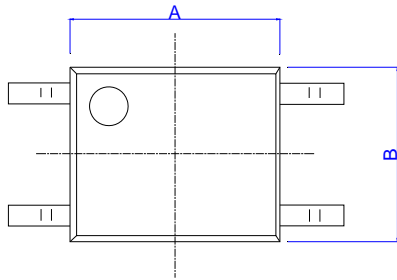


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.80	0.173		0.189
B	3.60		4.20	0.142		0.165
C						
D	1.90		2.30	0.075		0.091
E	5.00		5.60	0.197		0.220
F						
G	6.70			0.264		
H						
I						
J						

**Option None**

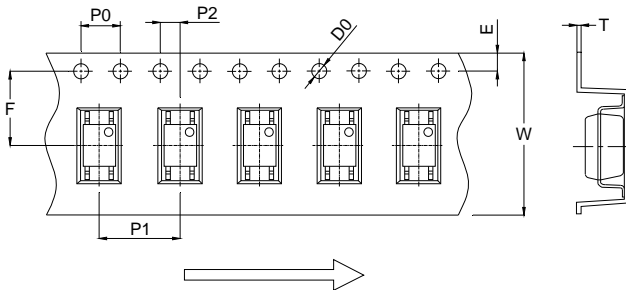


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.27	0.30	0.33	0.011	0.012	0.013
W	15.80	16.00	16.20	0.622	0.630	0.638

**Option R**

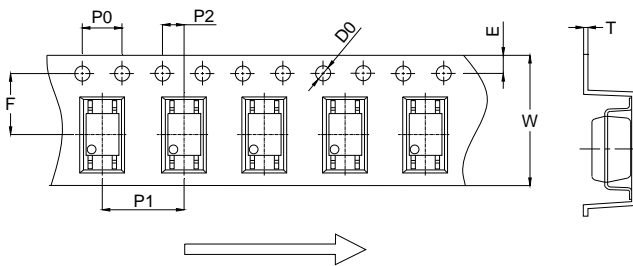

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	4.40	4.50	4.60	0.173	0.177	0.181
T	0.25	0.30	0.35	0.010	0.012	0.014
W	11.90	12.00	12.30	0.469	0.472	0.484

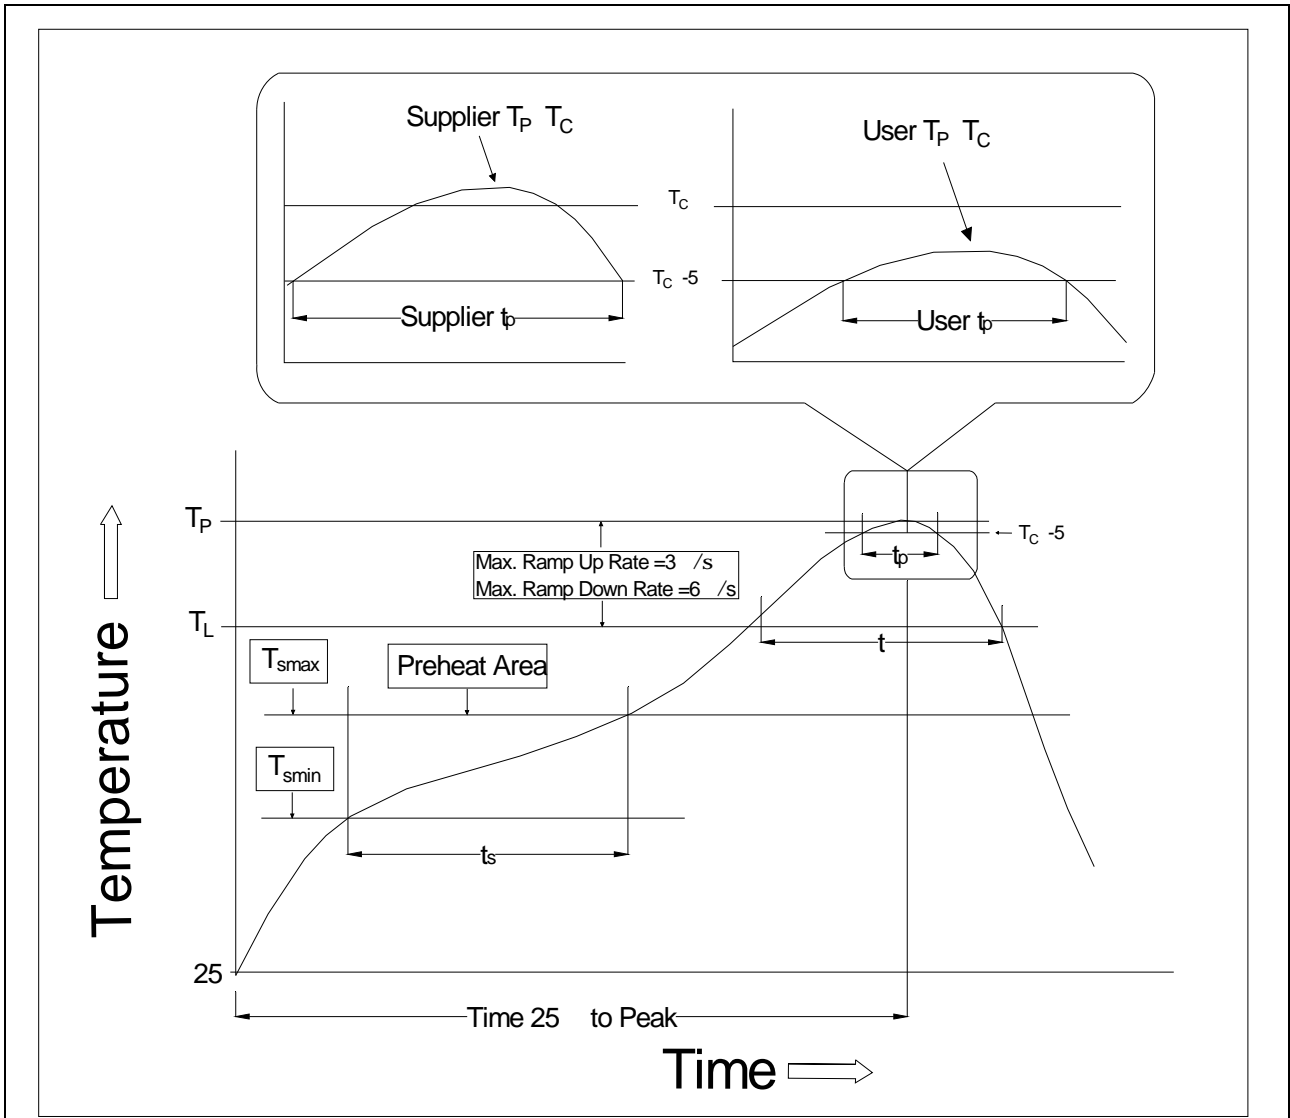

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T <sub>smin</sub> )	100	150
Temperature Max. (T <sub>smax</sub> )	150	200
Time (t <sub>s</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> )	60-120 seconds	60-120 seconds
Ramp-up Rate (t <sub>L</sub> to t <sub>P</sub> )	3 °/second max.	3 °/second max.
Liquidus Temperature (T <sub>L</sub> )	183	217
Time (t <sub>L</sub> ) Maintained Above (T <sub>L</sub> )	60-150 seconds	60-150 seconds
Peak Body Package Temperature	235 +0 /-5	260 +0 /-5
Time (t <sub>P</sub> ) within 5 ° of 260	20 seconds	30 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )	6 °/second max.	6 °/second max.
Time 25 ° to Peak Temperature	6 minutes max.	8 minutes max.

Note: