

650V 20A Trench and Field Stop IGBT

JJT20N65SS

Key Features:

- $V_{CE}=650V$
- $I_C=20A@T_C=100^{\circ}C$
- $V_{CE(sat)}=1.6V$



TO-220F

Features:

- High β
- 10^{10} β
- $P_{tot}(T_C=25^{\circ}C)$
- High β
- E
- R_{HS}

Applications:

- H
- M
- G



T	M	P	P
JJT20N65SS	T2065SS	TO-220F	T





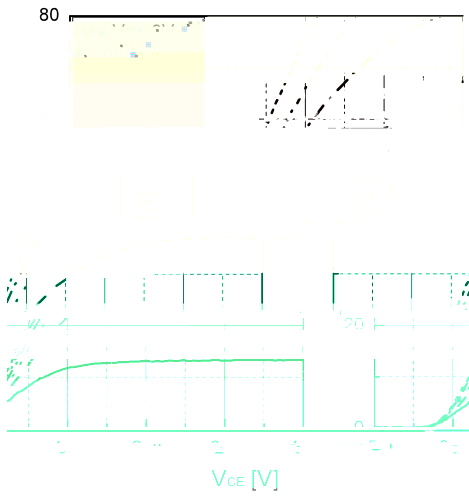
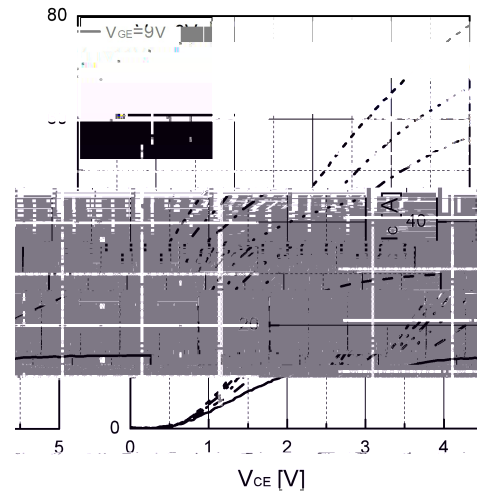
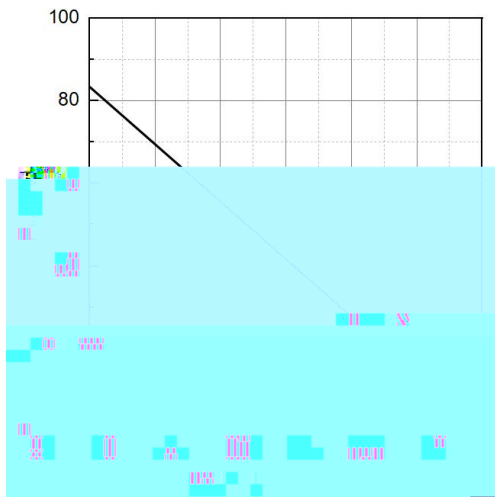
I_{CES} C - $I_{GE}=0V, I_C=250\text{ A}$ I_{M1} I_{M2}
6□



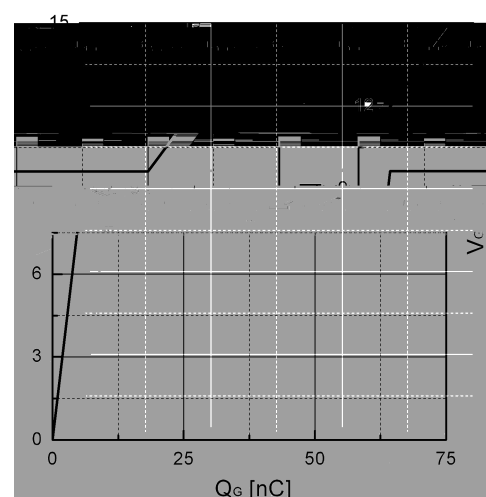
M . . M .

I_F

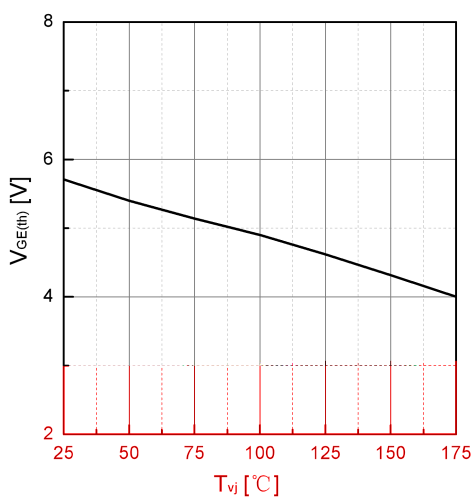
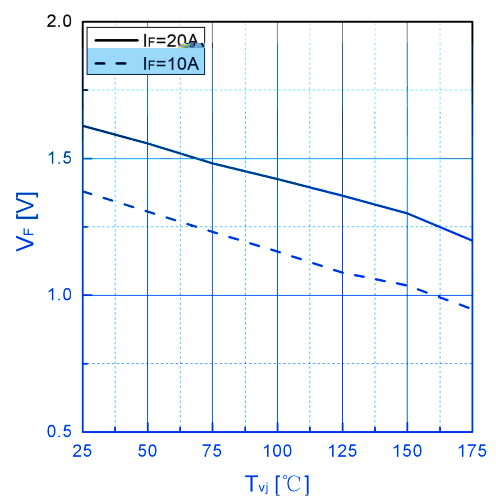
F D


F 1. T ($T_j = 25^\circ\text{C}$)

F 2. T ($T_j = 175^\circ\text{C}$)


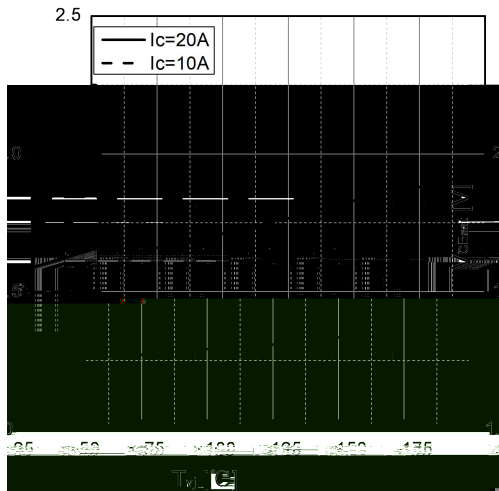
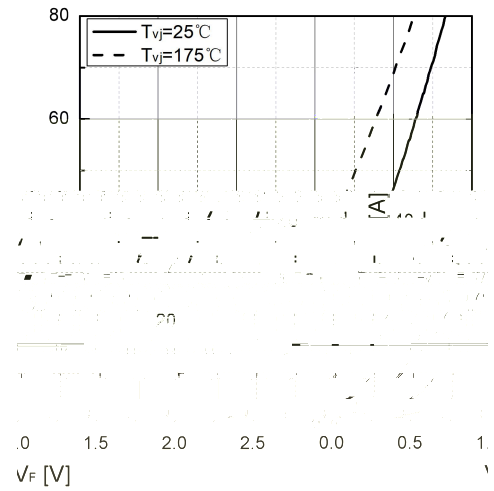
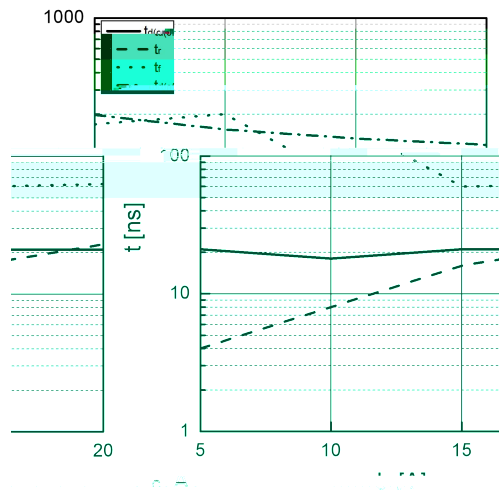
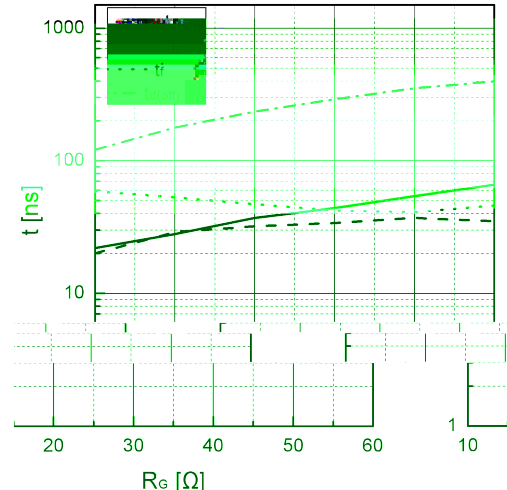
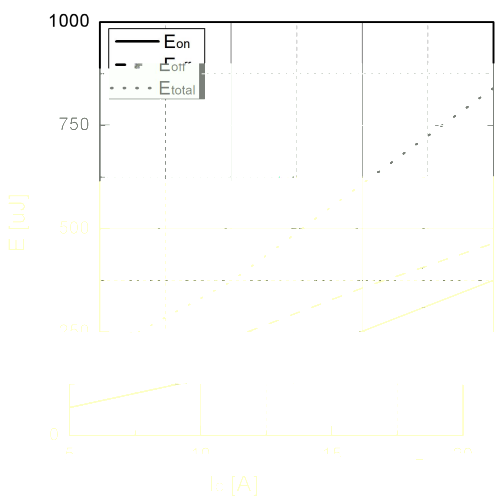
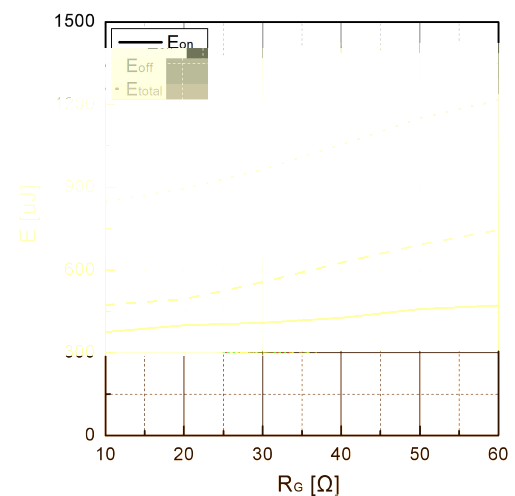
F 3. P

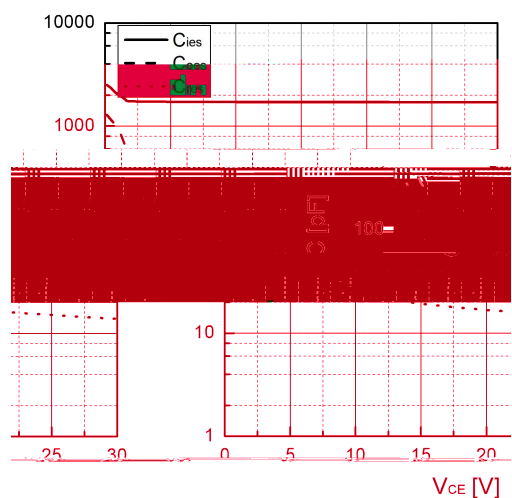


F 4. T G

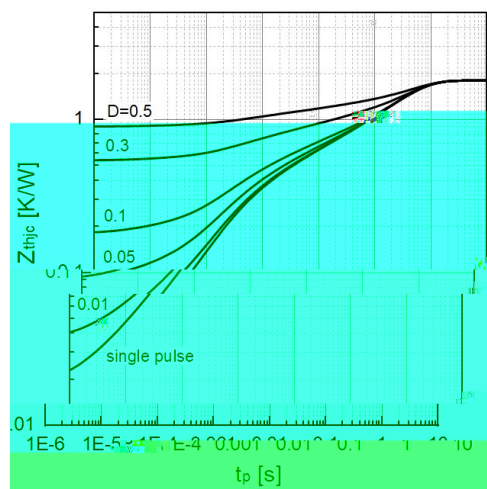

F 5. T $V_{GE(th)}$ ()
($c = 1 \text{ A}$)


F 6. T F


F 7. T CE

F 8. T F F

F 9. T C

F 10. T G

F 11. T C

F 12. T G

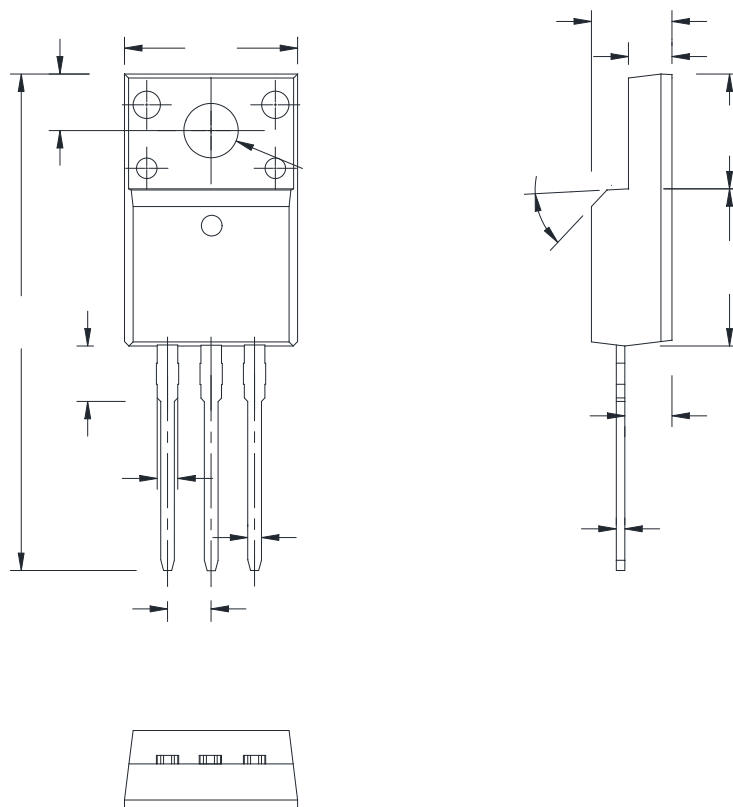


F 13. T
CE
(=1M, GE=0V)



F 14. T, IGBT

TO-220F



R .	D					
	M			I		
	M .	T .	M .	M .	T .	M .
A	4.50	-	4.90	0.177	-	0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47	-	0.66	0.019	-	0.026
C2	2.45	-	2.75	0.096	-	0.108
C3	2.60	-	3.00	0.102	-	0.118
D	8.80	-	9.30	0.346	-	0.366
E	9.80	-	10.40	0.386	-	0.410
F	6.40	-	6.80	0.252	-	0.268
G	2.40	-	2.70	0.094	-	0.106
H	28.0	-	29.80	1.102	-	1.173
L1	-	3.63	-	-	0.143	-
L2	1.14	-	1.70	0.045	-	0.067
L3	-	3.30	-	-	0.130	-
V1	-	45 °	-	-	45 °	-



D	R	C
2023-12-05	R 1.0	R .
2024-05-20	R 1.1	U
2025-03-06	R 1.2	C
2026-06-24	R 1.3	U

D

PLEASE NOTE - J J J M C ., L ("JJM") , ,

/ . I

, . T

JJM JJM'

JJM'

. P JJM

, JJM' . A JJM

. T JJM

J J J M C ., L . T

. 2026 JJM - A