



	°C			



	°C					
	°C					
	°C					
						Ω

			±		

FIG 1: Forward characteristic (per diode)

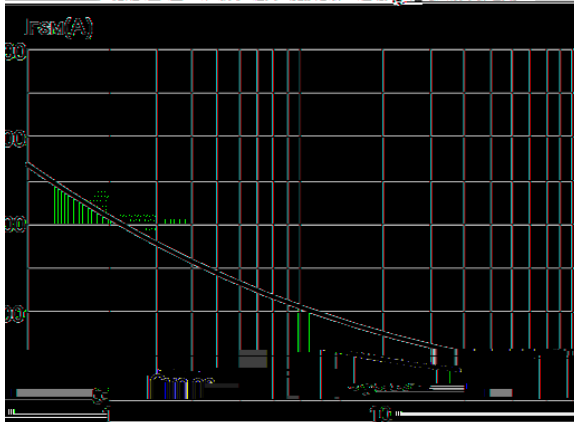


FIG 2: Reverse saturation current

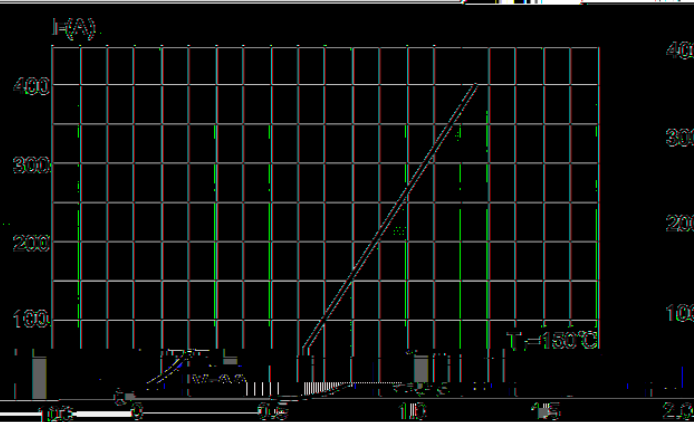


FIG 3: Maximum transient thermal impedance



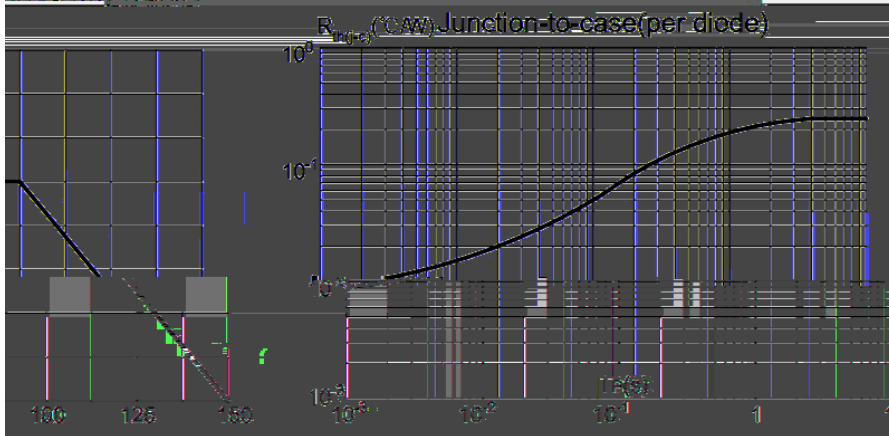


FIG 4: Forward current vs. case temperature

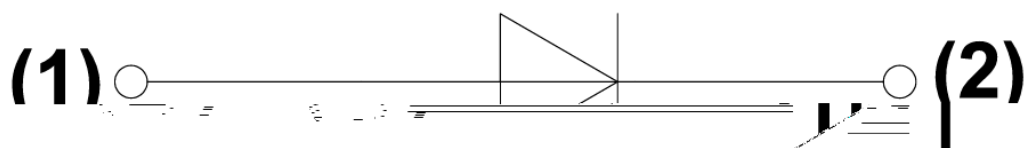

A视图

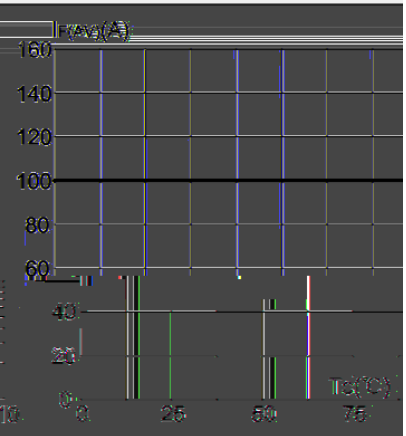