




4
4
4

°C		

4
4
4

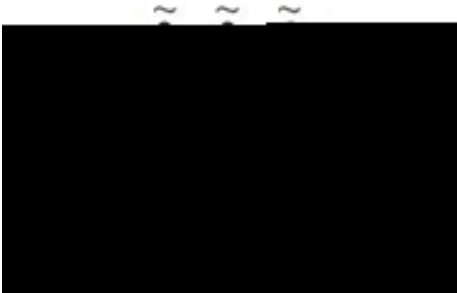

0

	0			
	0			
	0			



0

FIG.1: Forward characteristics(per diode)

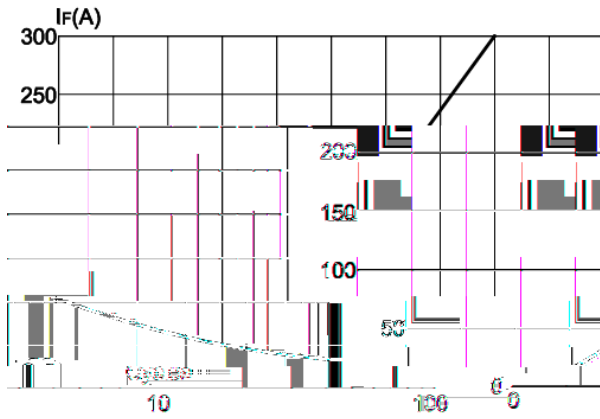


FIG.2: Peak on-state surge current

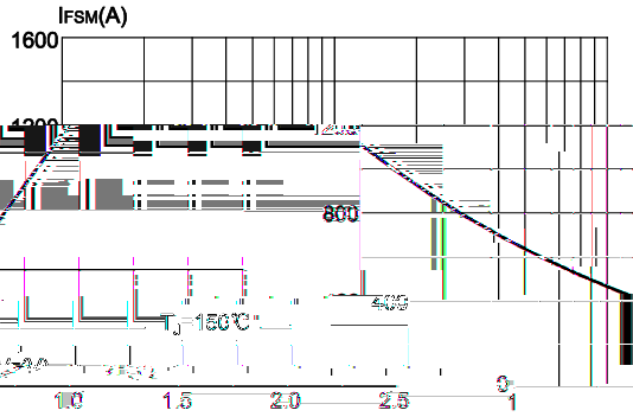


FIG.3: Forward current vs. case temperature

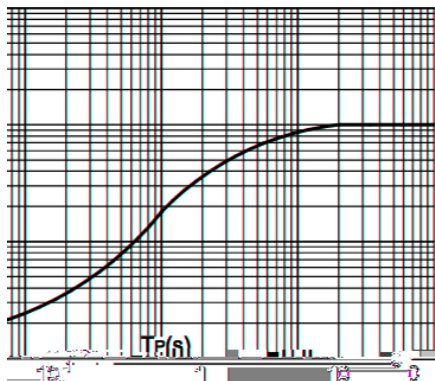


FIG.4: Maximum transient thermal impedance

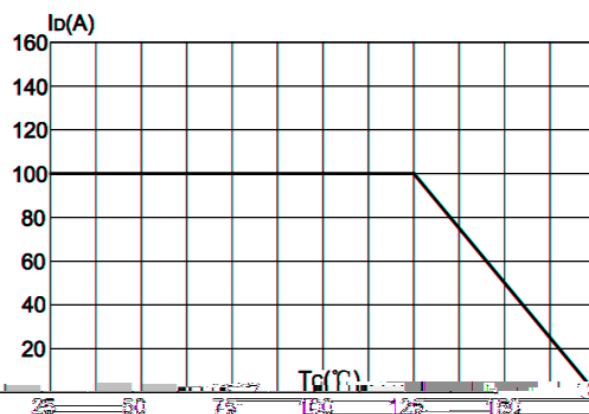


FIG.5: Maximum average power dissipation

