





| °C |  |  |
|----|--|--|
|    |  |  |
|    |  |  |

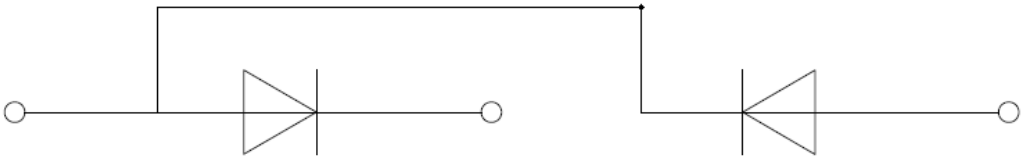

|  | °C |  |  |  |
|--|----|--|--|--|
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |

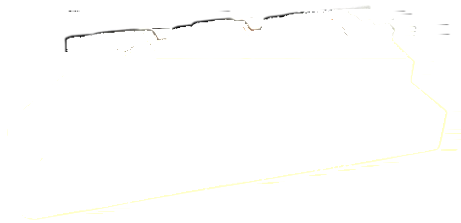

|  | °C |  |  |  |  |   |
|--|----|--|--|--|--|---|
|  | °C |  |  |  |  |   |
|  | °C |  |  |  |  |   |
|  |    |  |  |  |  | Ω |

**FIG.1:** Forward characteristics(per diode)


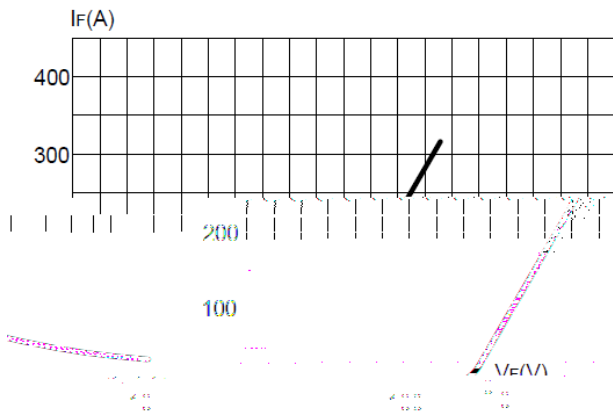


**FIG.2:** Peak on-state surge current

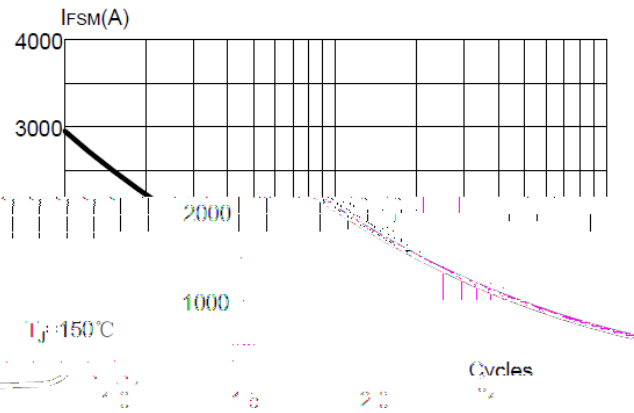

Maximum transient thermal impedance  
Junction-to-case(per diode)

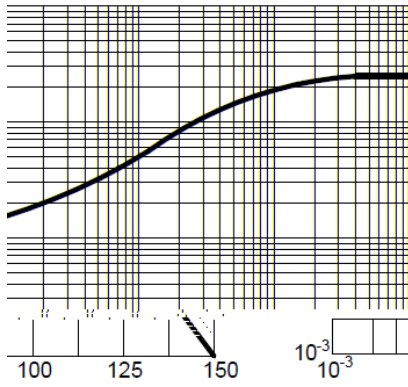


**FIG.3:** Forward current vs. case temperature

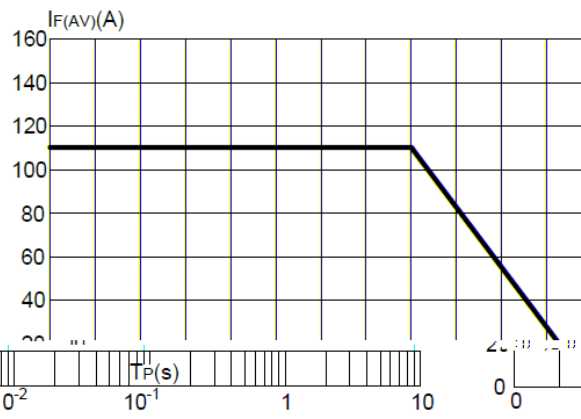


**FIG.4:** Maximum

