





|  | °C |  |  |  |  |  |
|--|----|--|--|--|--|--|
|  | °C |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  | °C |  |  |  |  |  |
|  |    |  |  |  |  |  |

**FIG.1: Forward characteristics(per diode)**

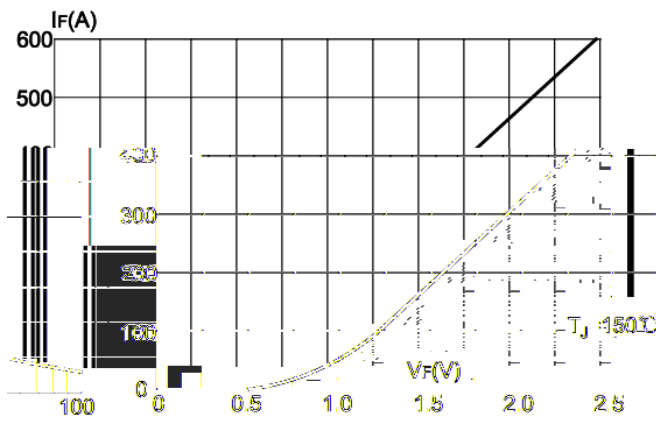


**FIG.2: Peak on-state surge current**

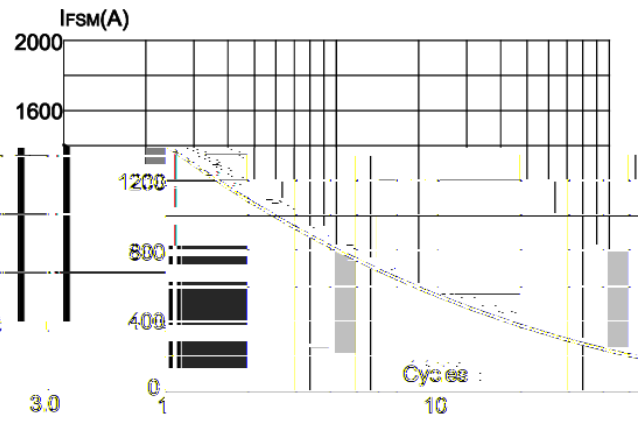


**FIG.3: Forward current vs. case temperature (per diode)**

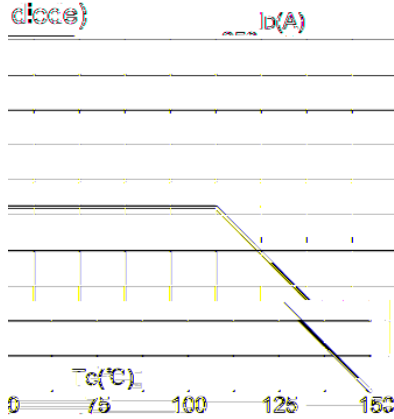


**FIG.4: Thermal resistance (per diode)**

