





	°C					
	°C					
	°C					
						Ω

			±		



FIG.1: Forward characteristics(per diode)

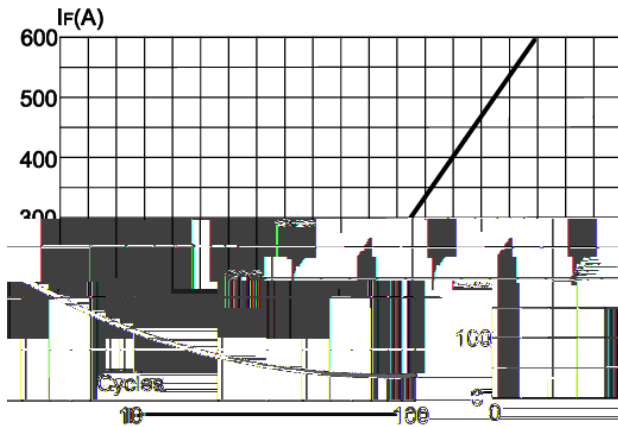


FIG.2: Peak on-state surge current

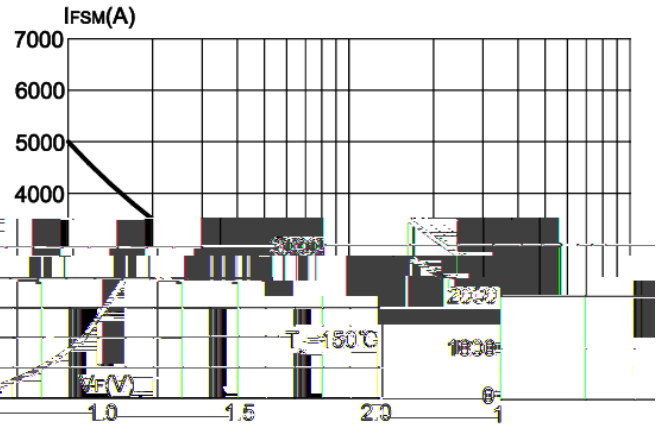


FIG.3: Forward current vs. case temperature

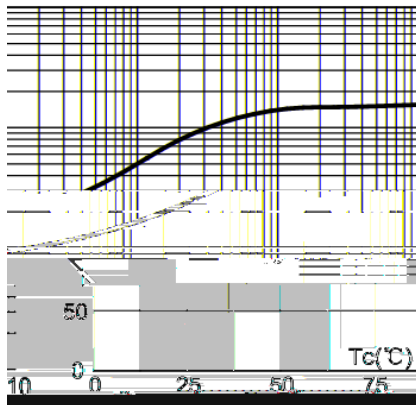


FIG.4: Maximum transient thermal impedance

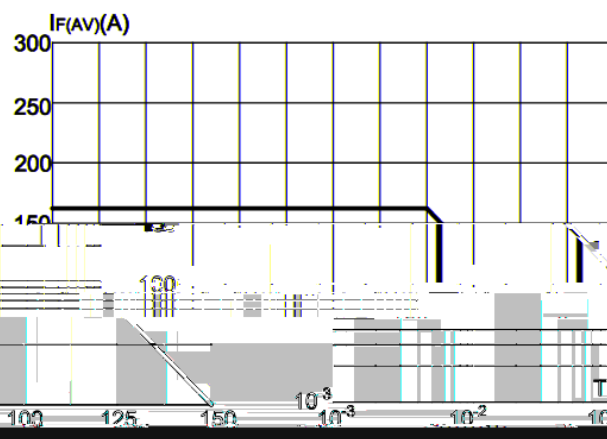


FIG.5: Maximum junction temperature

