





6

	°C					
	°C					
	°C					
	°C					

6

FIG.1: Forward characteristics(per diode)

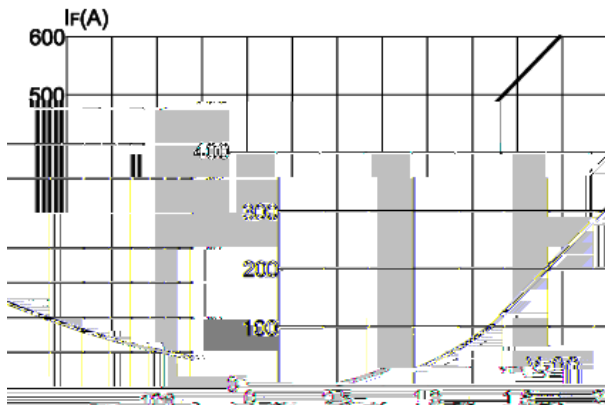


FIG.2: Peak on-state surge current

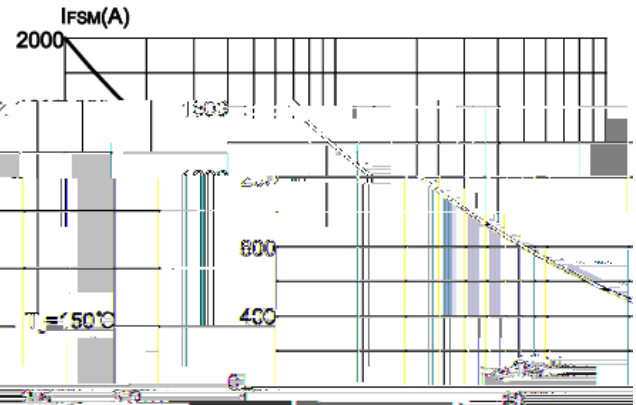


FIG.3: Forward current vs. case temperature




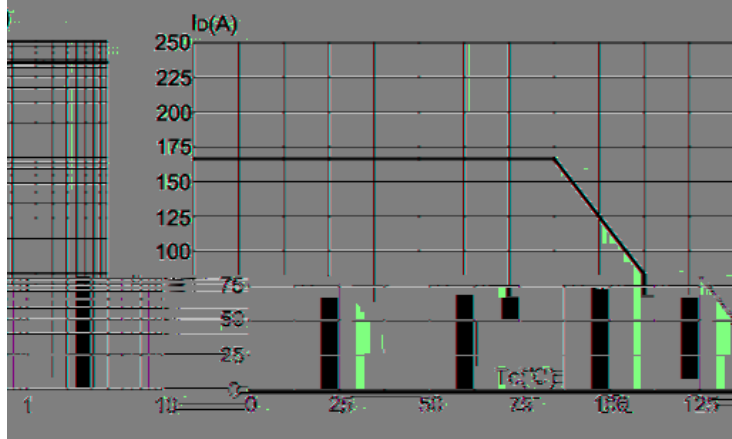


FIG.4: Maximum transient thermal impedance (Rthj-cj) Junction-to-case(per diode)



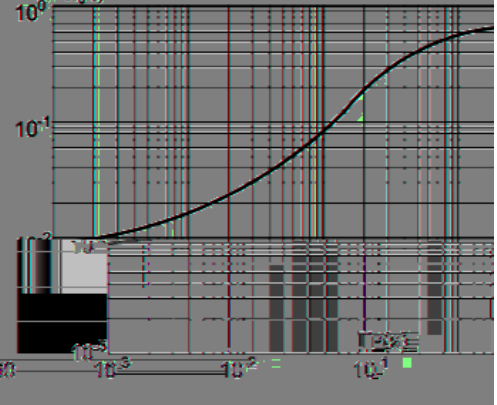

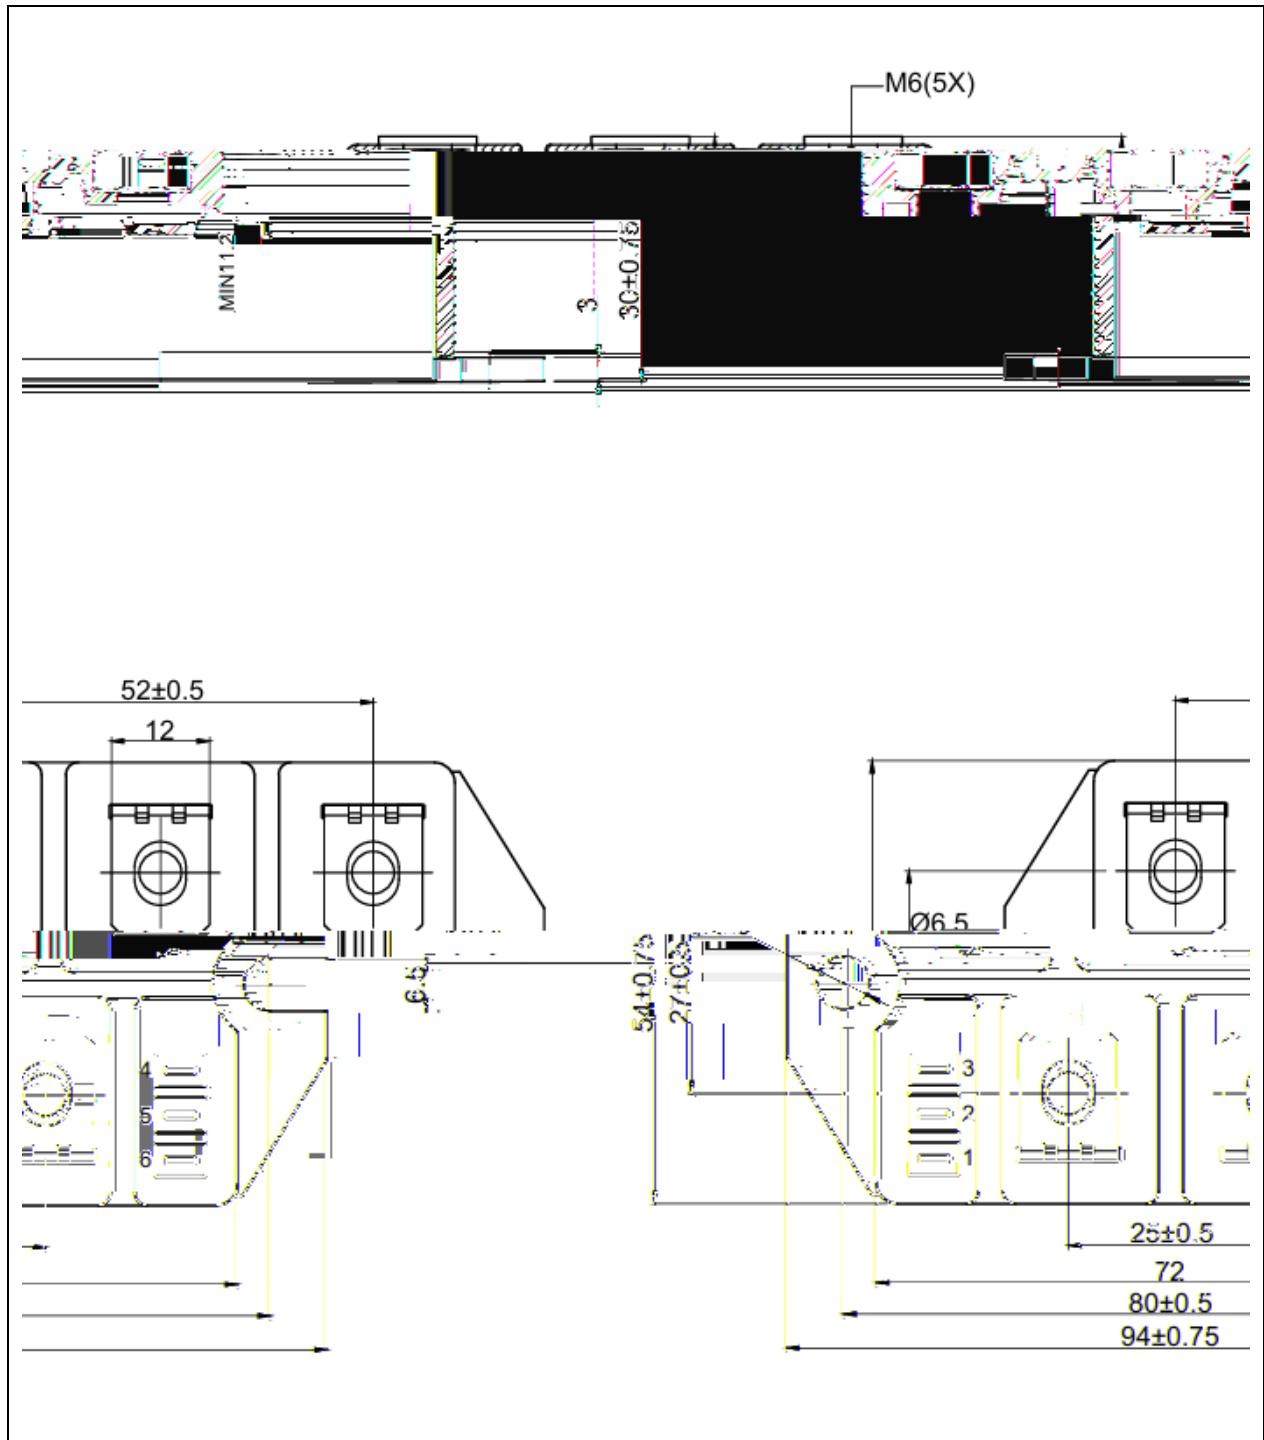

" ! "

