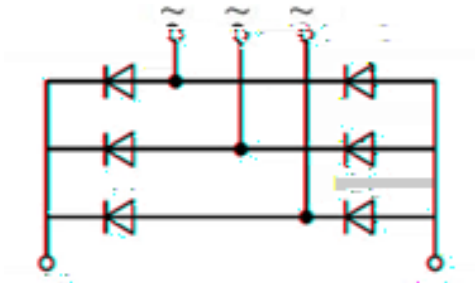
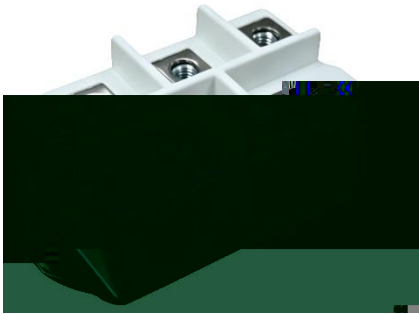




)





	6			
	°C			
	°C			
				°C



)

6

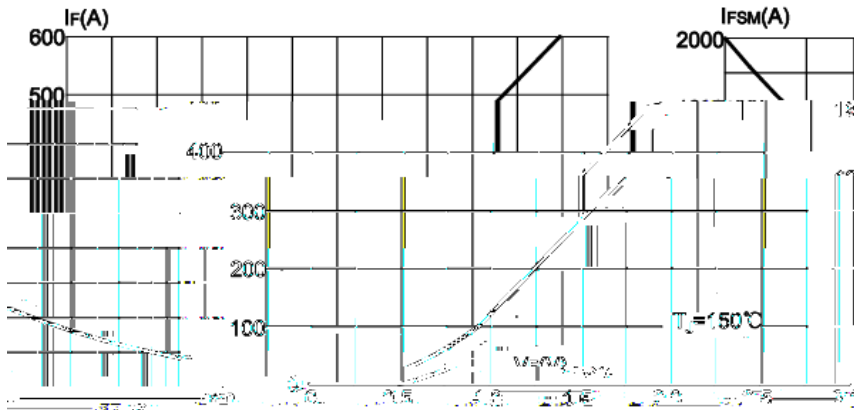
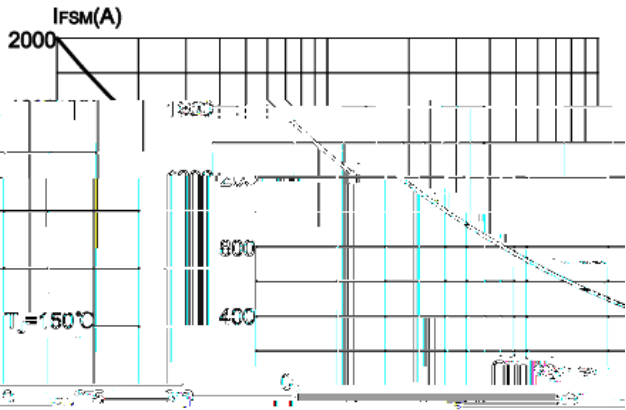
	6					
			!	!	!	
	°C					
	°C					
	°C					
	°C					

6

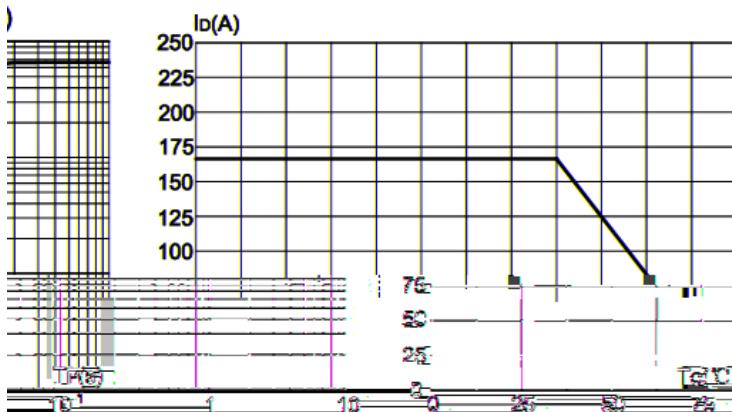
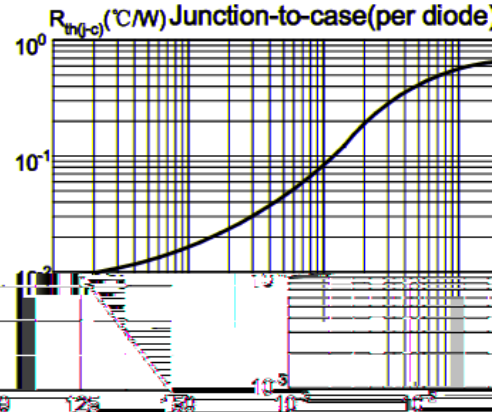
	6					
			!	!	!	

					6

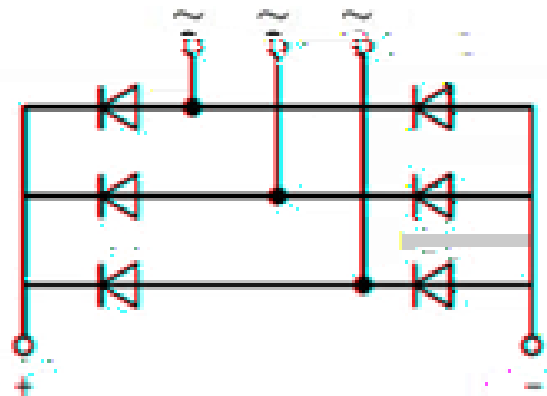
6

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current


edance

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance


6





)





)

