



°C		

	°C			



			▲	▲	▲	
	°C					
	°C					
	°C					
						Ω

			▲	▲	▲	



!

FIG.1: Forward characteristics(per diode)


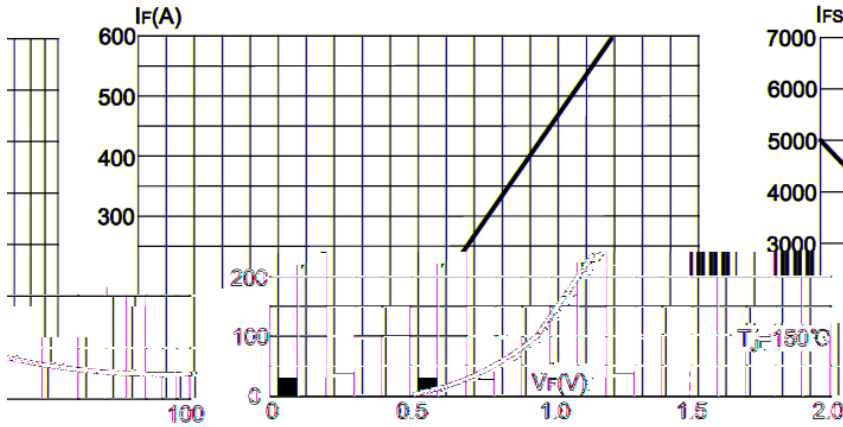


FIG.2: Peak on-state surge current

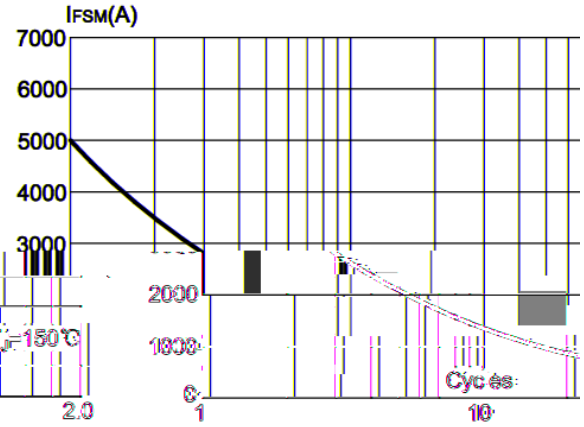

ial impedance
diode)

FIG.3: Forward current vs. case temperature

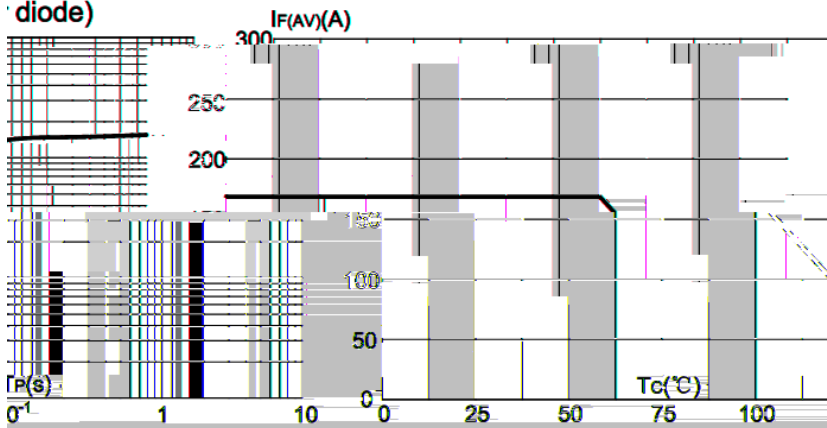


FIG.4: Maximum transient thermal

