



0 ! 0 □


0

2 M

M

MM	BM	A
°C		

M

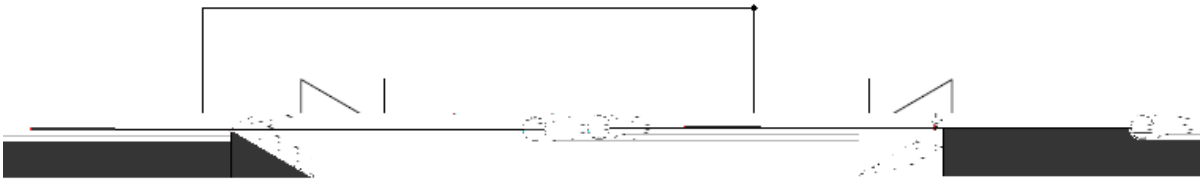

M	M		BM	A
MM				
	°C			



1 M MM

MM			BM			A
					M	
	°C					
	°C					
	°C					
						Ω

M MM

MM			BM			A
					M	

5 M

0	M	M M	C	5 .	M



M 1 M M MM

FIG.1: Forward characteristics(per diode)

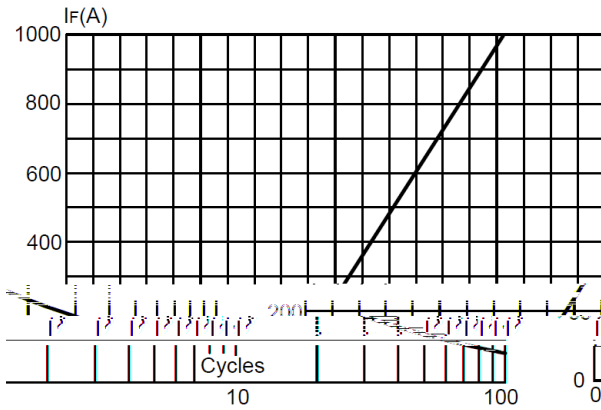


FIG.2: Peak on-state surge current

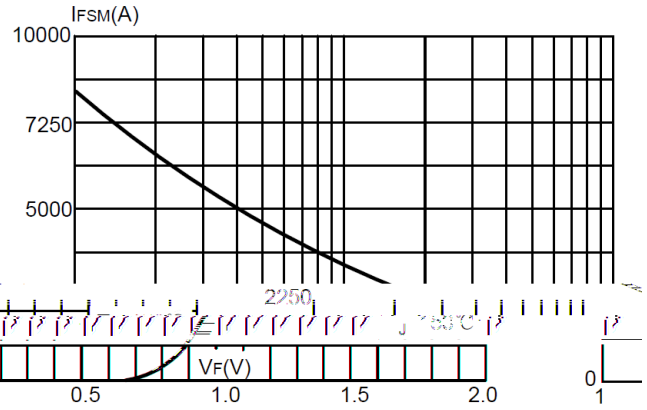


FIG.3: Forward current vs. case temperature



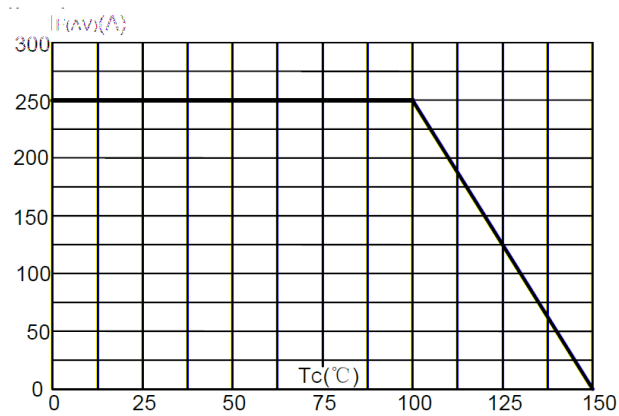



FIG.4: Maximum transient thermal impedance

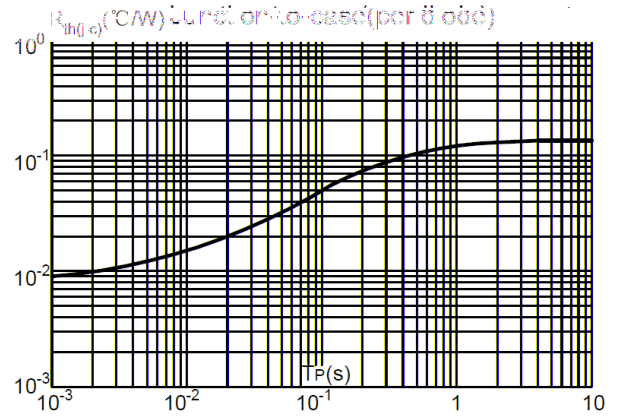

0 M M

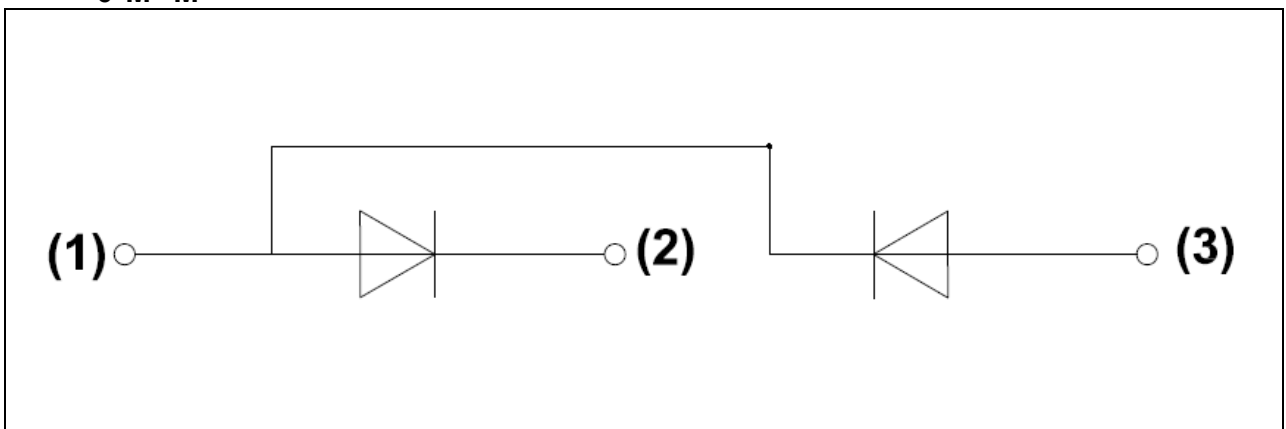

M M

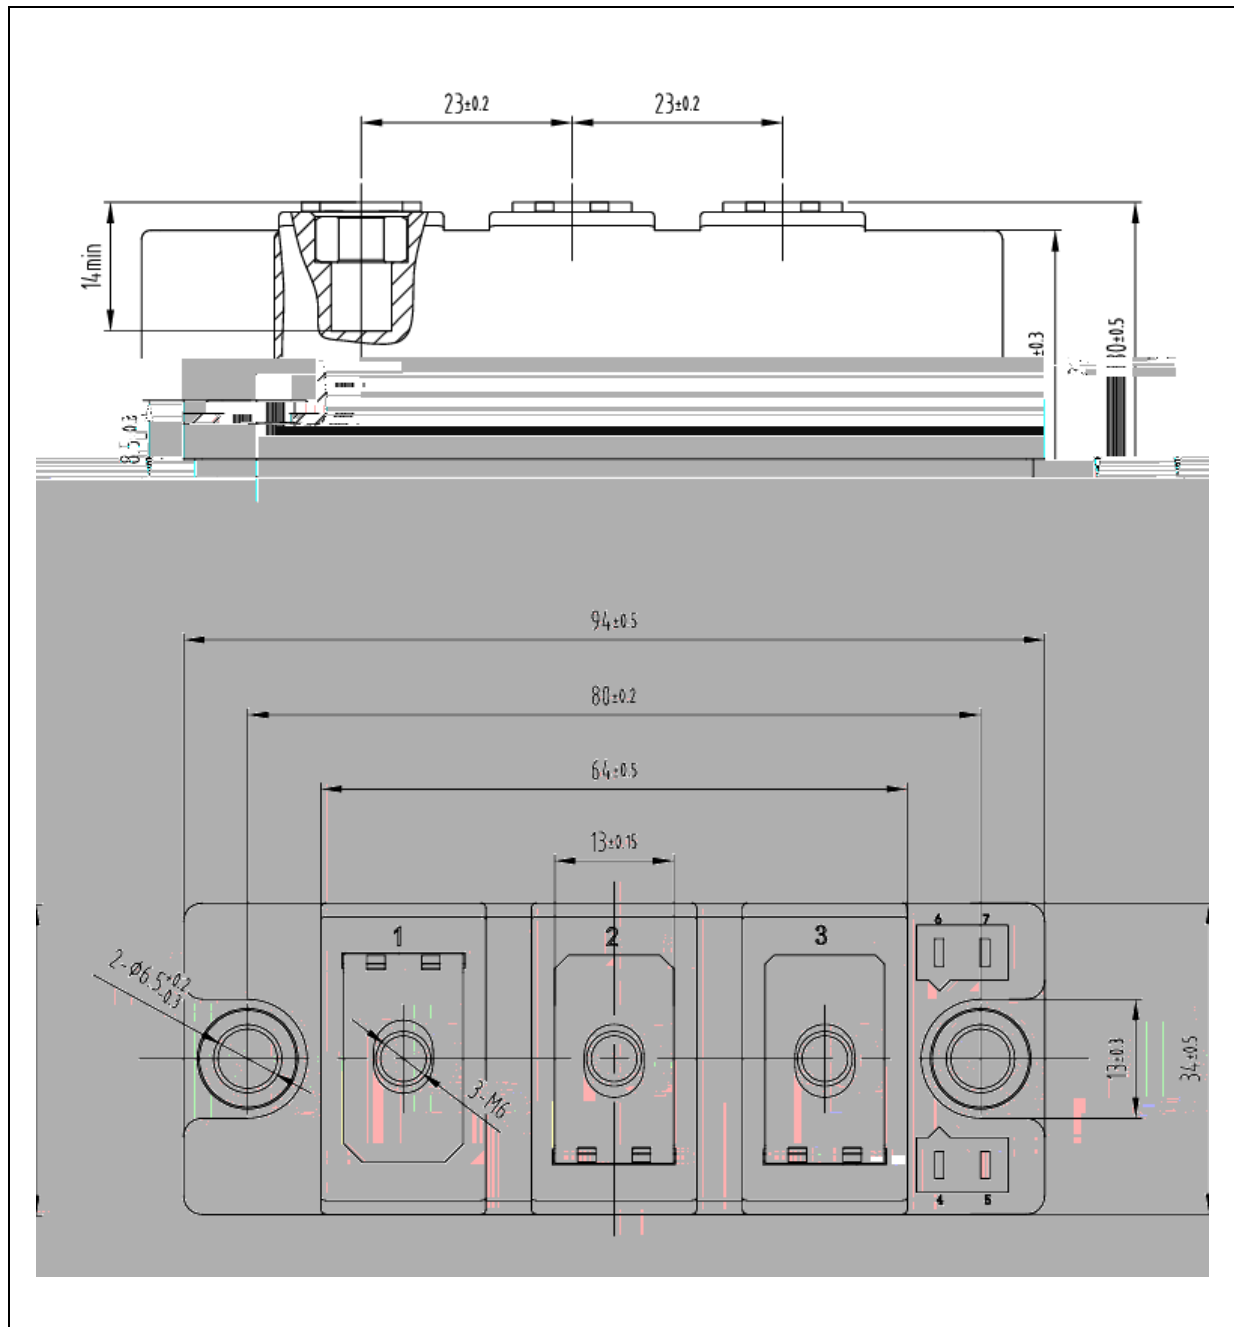



0 ! 0 □