




| °C |  |  |
|----|--|--|
|    |  |  |
|    |  |  |



|  | °C |  |  |  |
|--|----|--|--|--|
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |

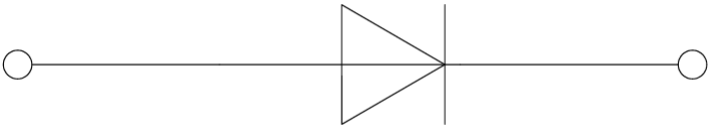

|  |  |  |  |          |
|--|--|--|--|----------|
|  |  |  |  |          |
|  |  |  |  |          |
|  |  |  |  |          |
|  |  |  |  |          |
|  |  |  |  |          |
|  |  |  |  |          |
|  |  |  |  | $\Omega$ |





**FIG.1:** Forward characteristics(per diode)

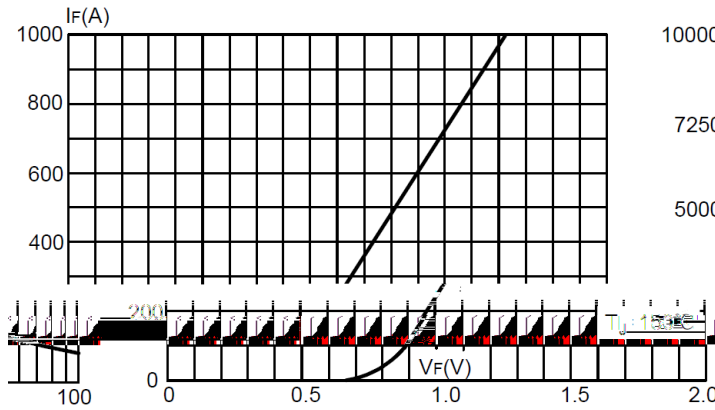


**FIG.2:** Peak on-state surge current

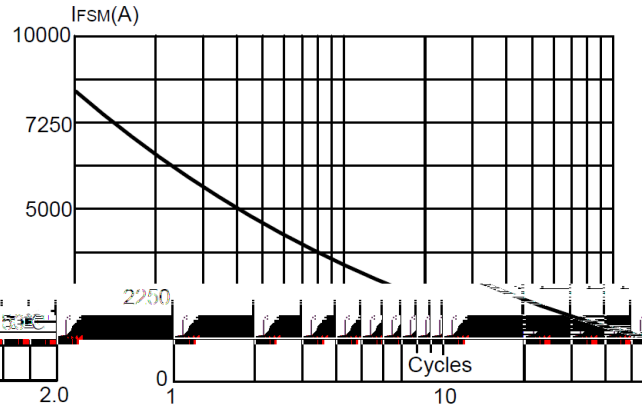


**FIG.3:** Forward current vs. case temperature

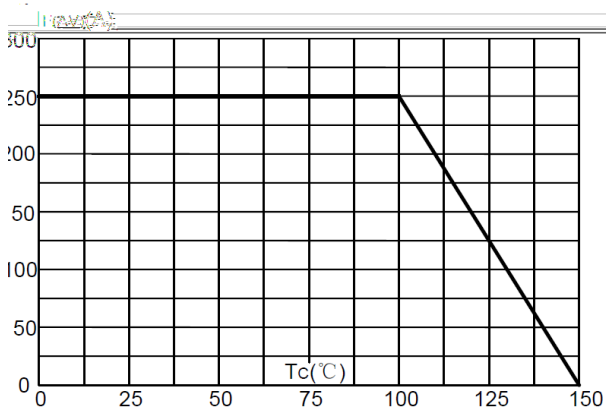


**FIG.4:** Maximum transient thermal impedance

