





" 5! (D"1



C

	F	E
°C		

1

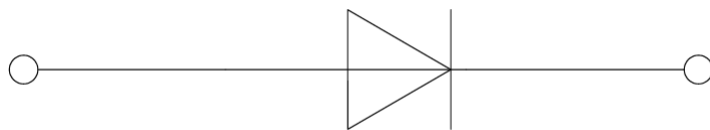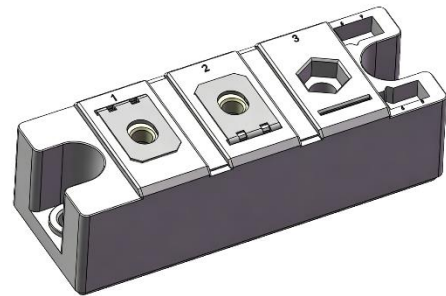

1

B

		C	F	E
	°C			



5

		C	F			E
				D		
	°C					
	°C					
	°C					
						Ω

D

		C	F			E
				D		

			G	2	
			±		

D 5 D

FIG.1: Forward characteristics(per diode)

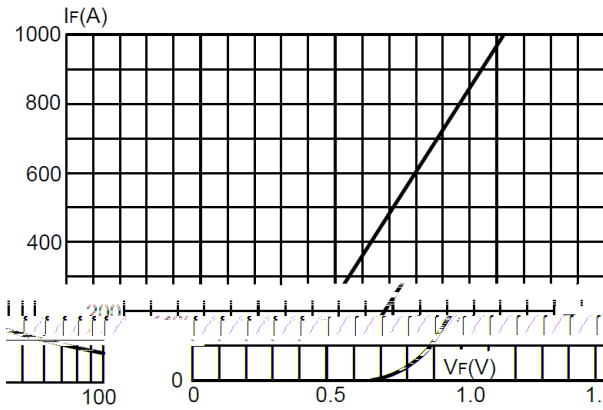


FIG.2: Peak on-state surge current

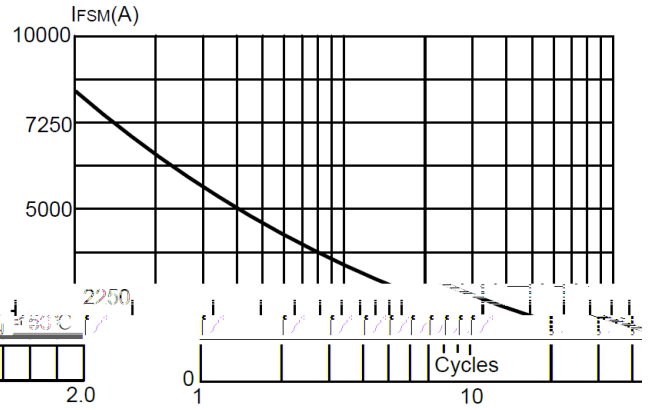


FIG.3: Forward current vs. case temperature




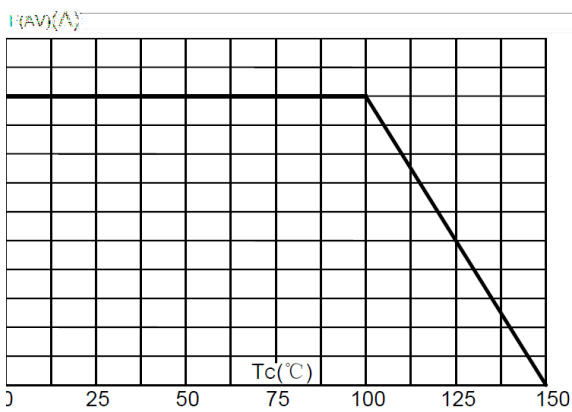


FIG.4: Maximum transient thermal impedance

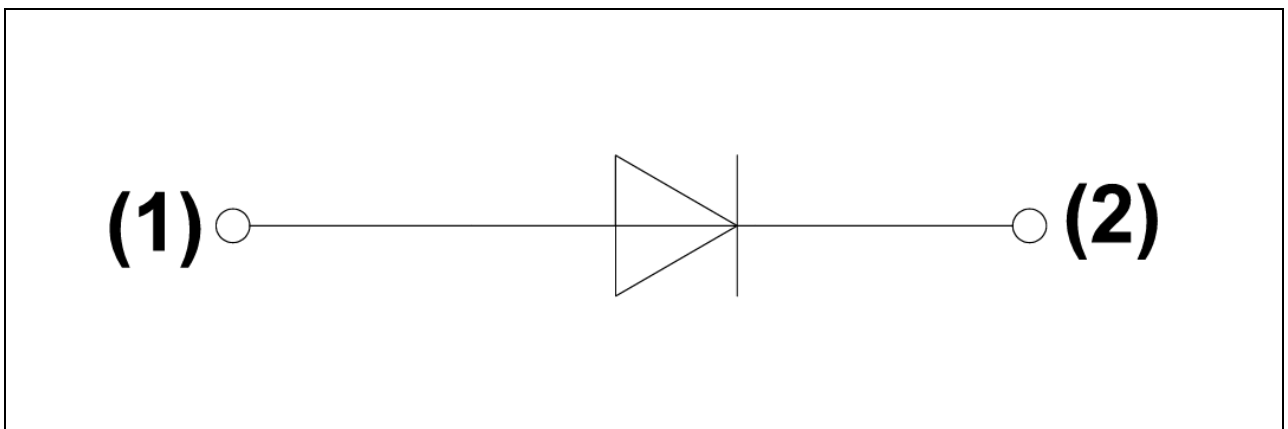

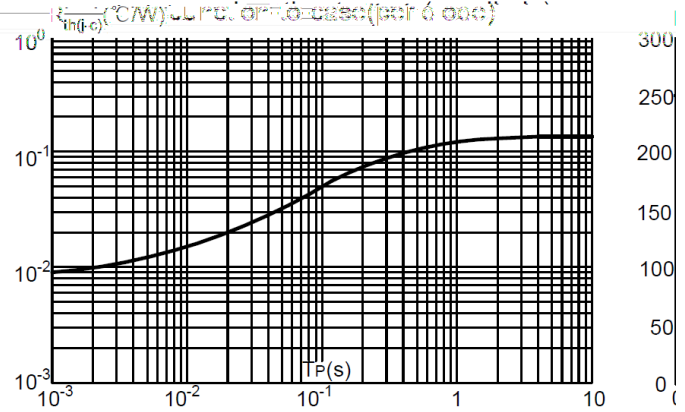

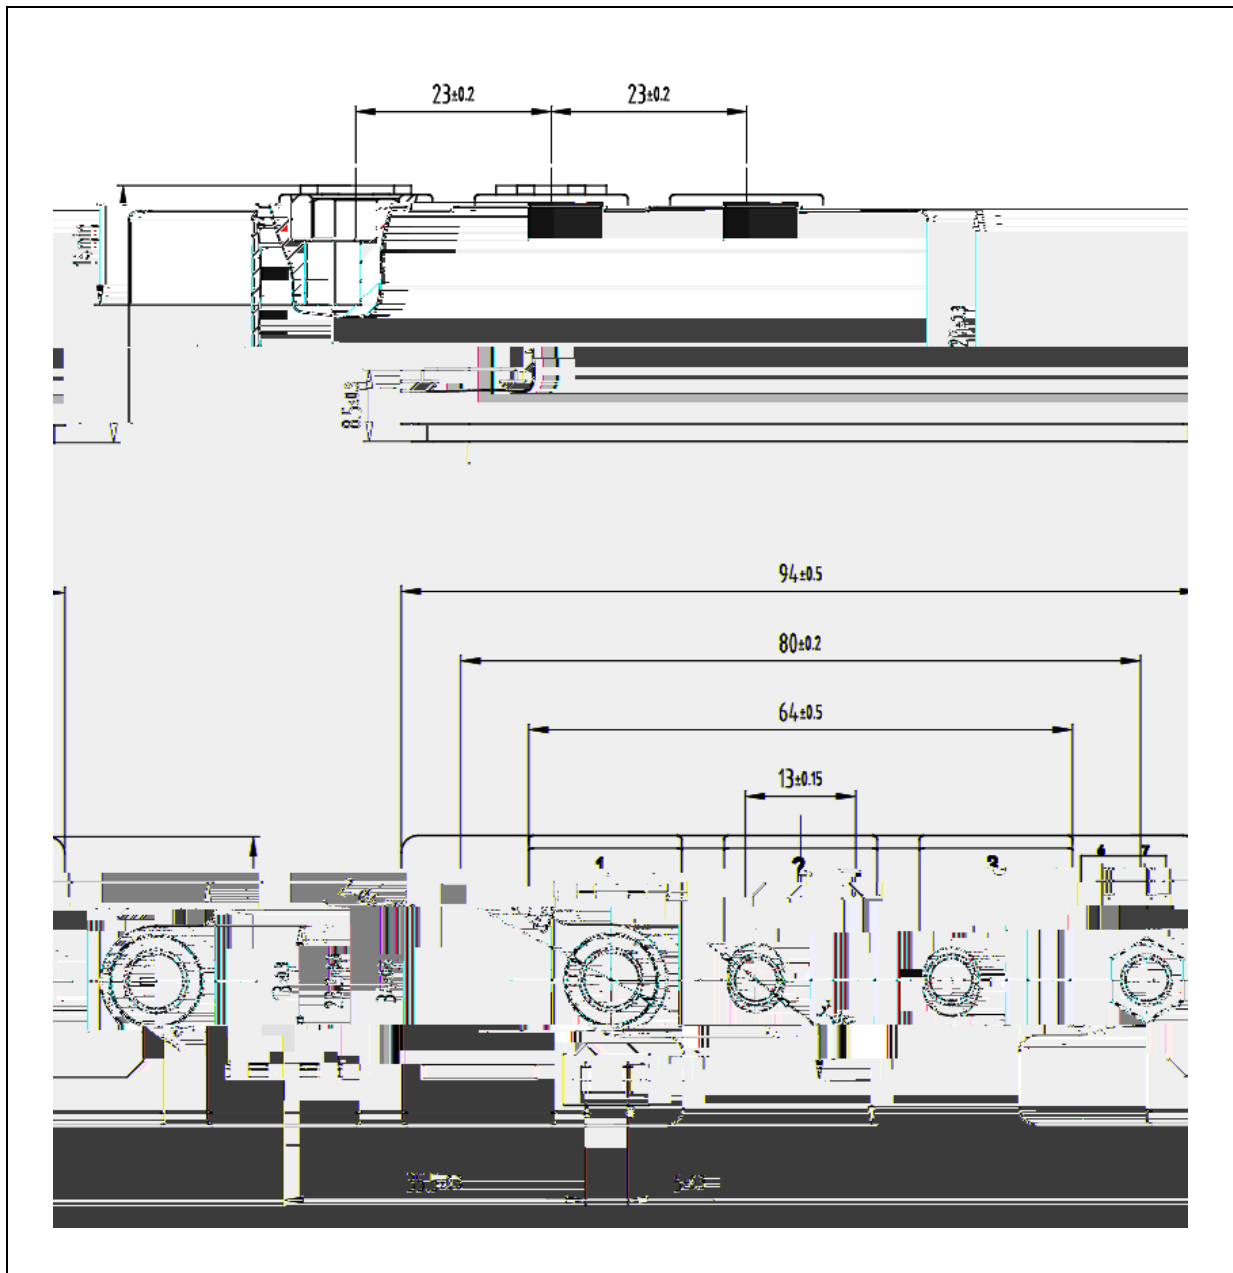

" 5! (D"1

