




AD B) K(

D

G J

G	M	L
°C		



D I

G		J	M	L
	°C			



G		J	M			L
			D	K	D	
	°C					
	°C					
	°C					
						Ω

K

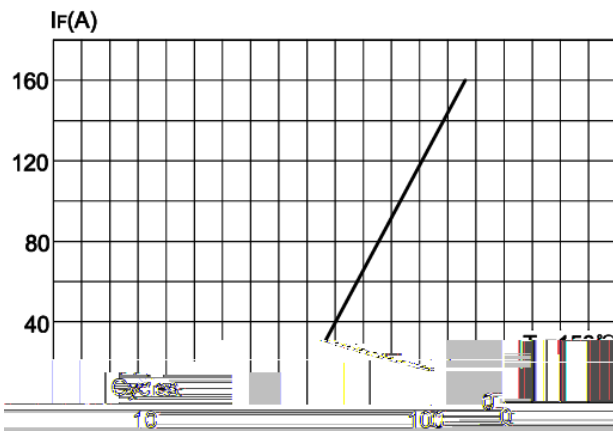
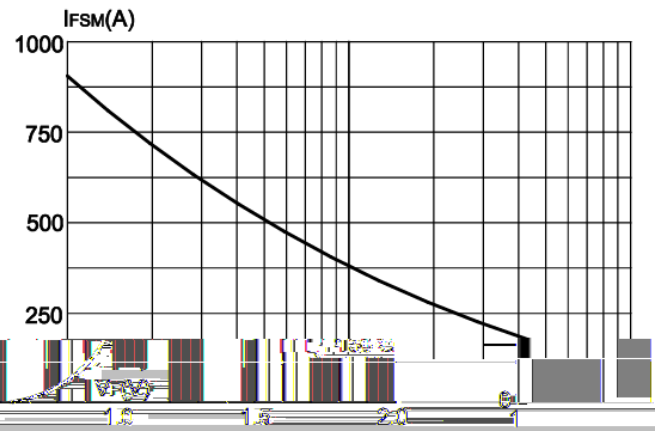
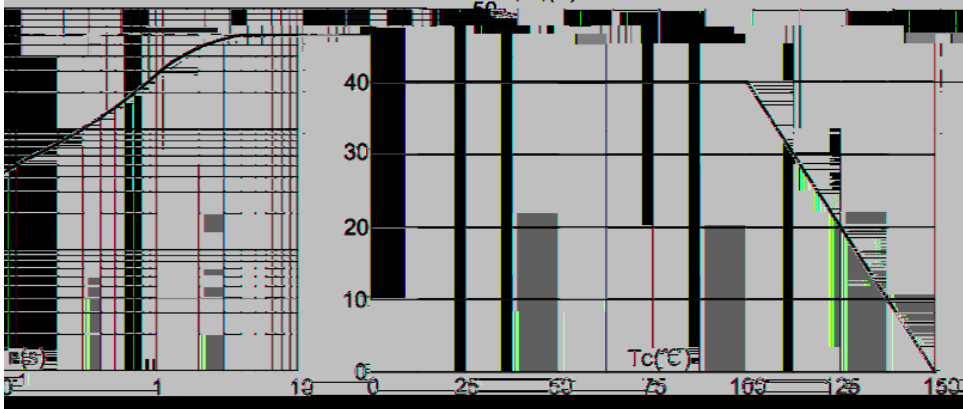
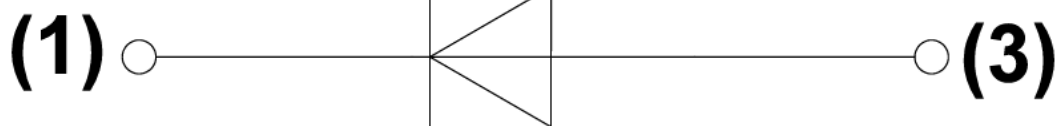
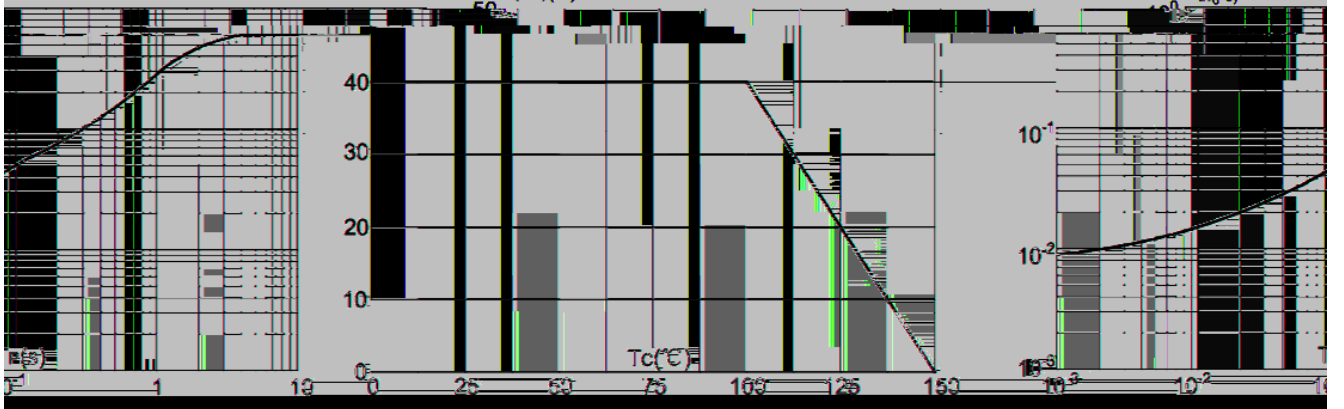
G		J	M			L
			D	K	D	

F

	D	G			G

K

□ K

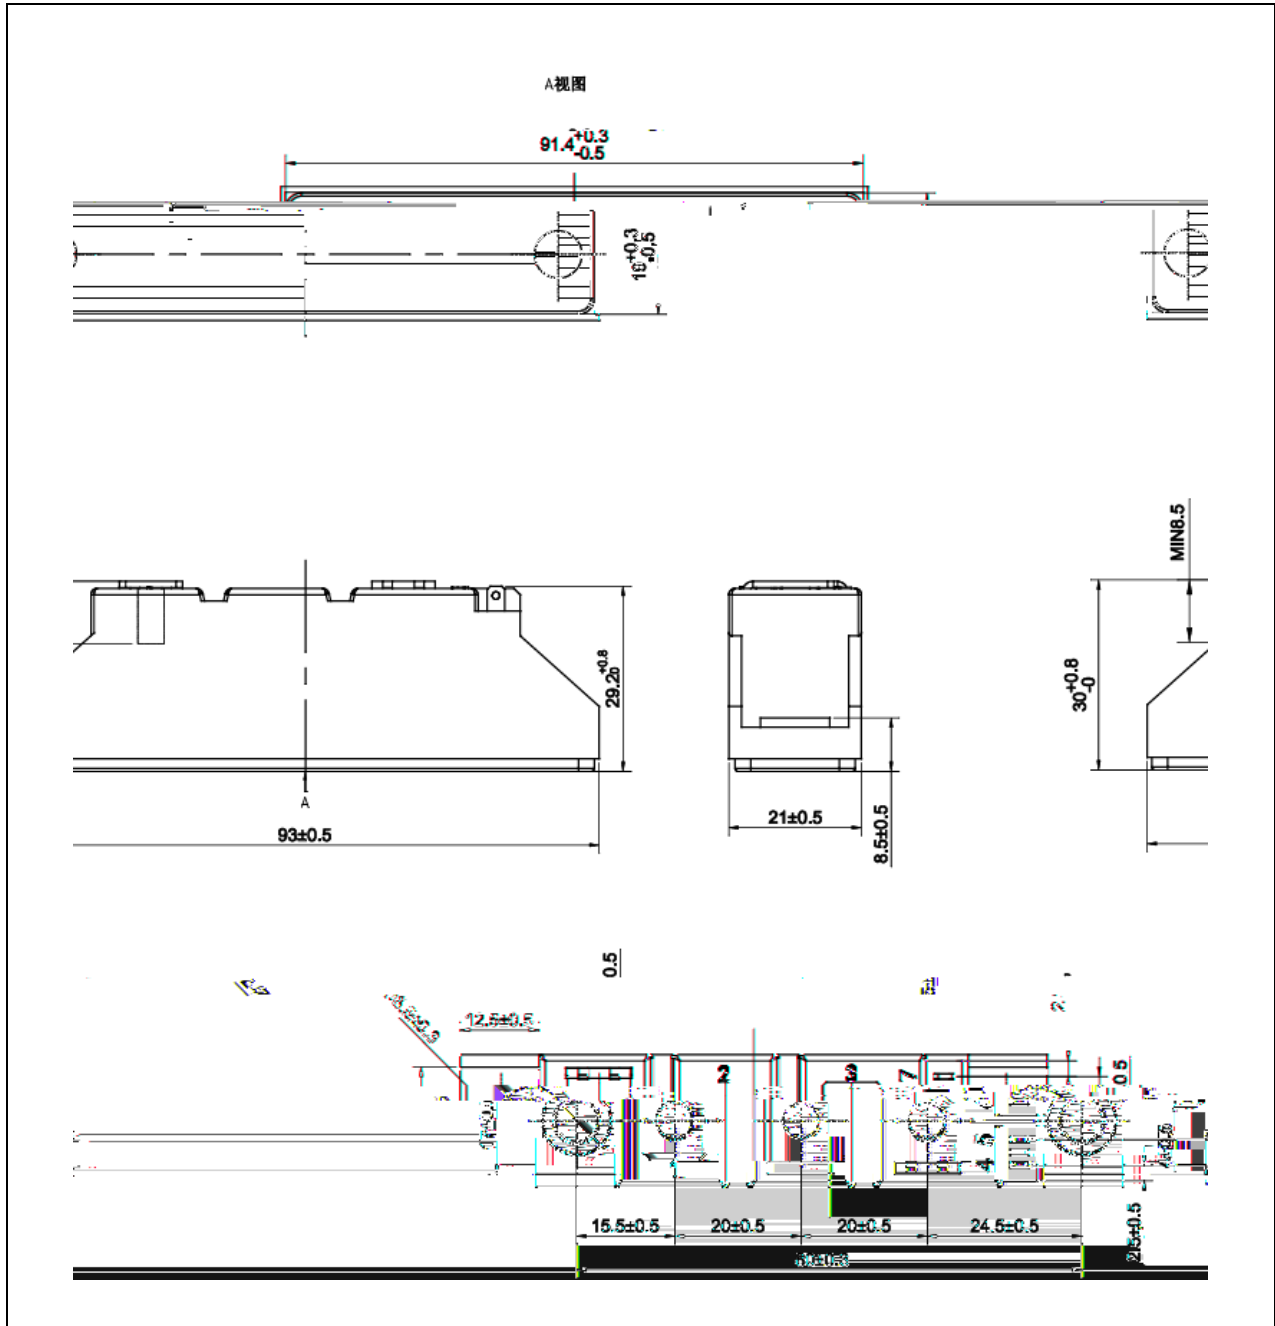
FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

FIG.3: Forward current vs. case temperature

FIG.4: Maximum junction-to-case thermal impedance




AD B) K(

G

F





AD B) K(

