





°C		



	°C			

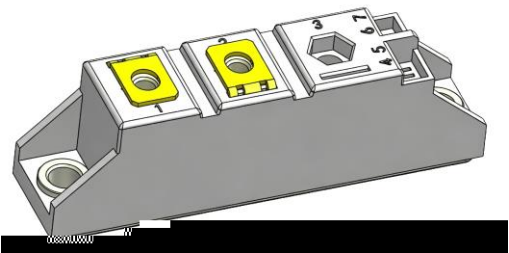

	°C					
	°C					
	°C					
						Ω



FIG.1: Forward characteristics(per diode)

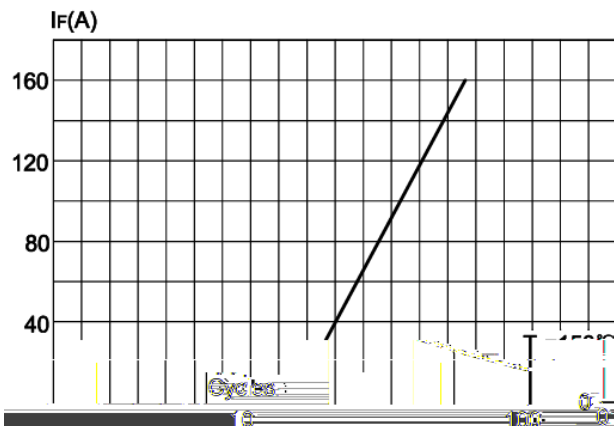


FIG.2: Peak on-state surge current

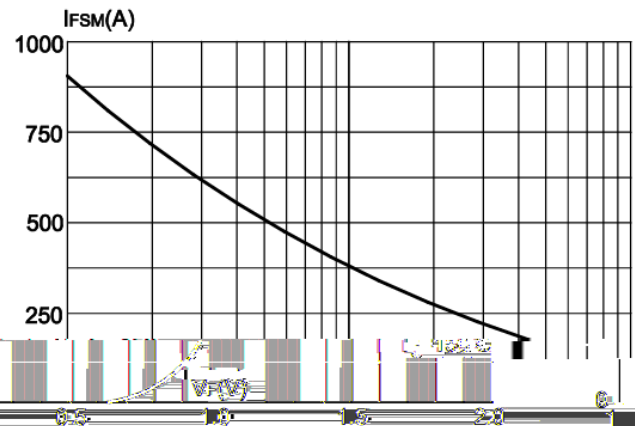


FIG.4: Maximum transient thermal impedance ($Z_{th(jc)}$) Junction-to-case(per diode)

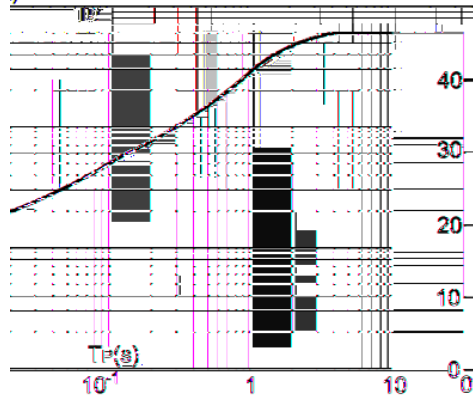


FIG.3: Forward current vs. case temperature



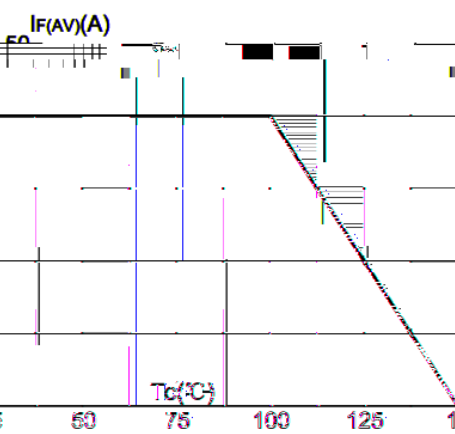


FIG.4

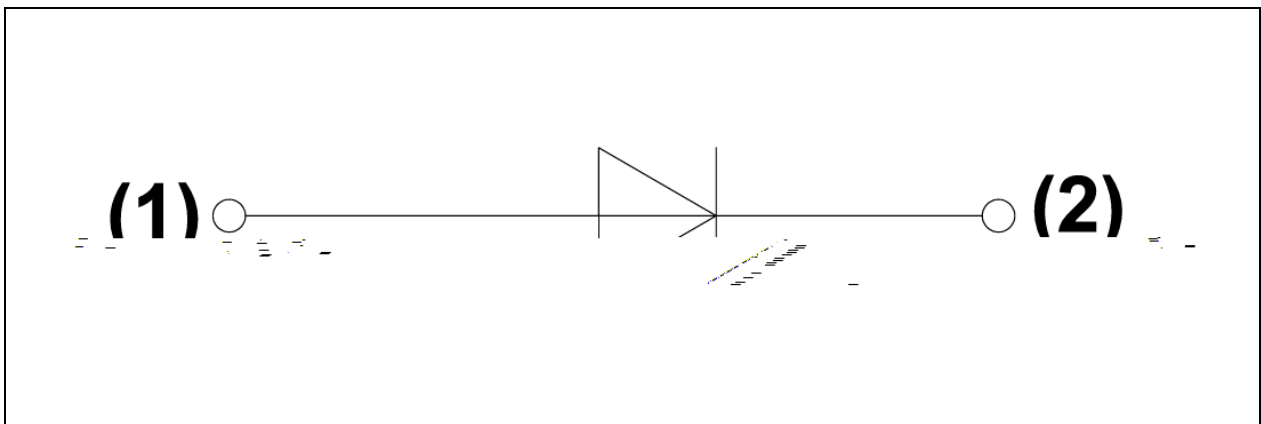

A视图

