





°C		

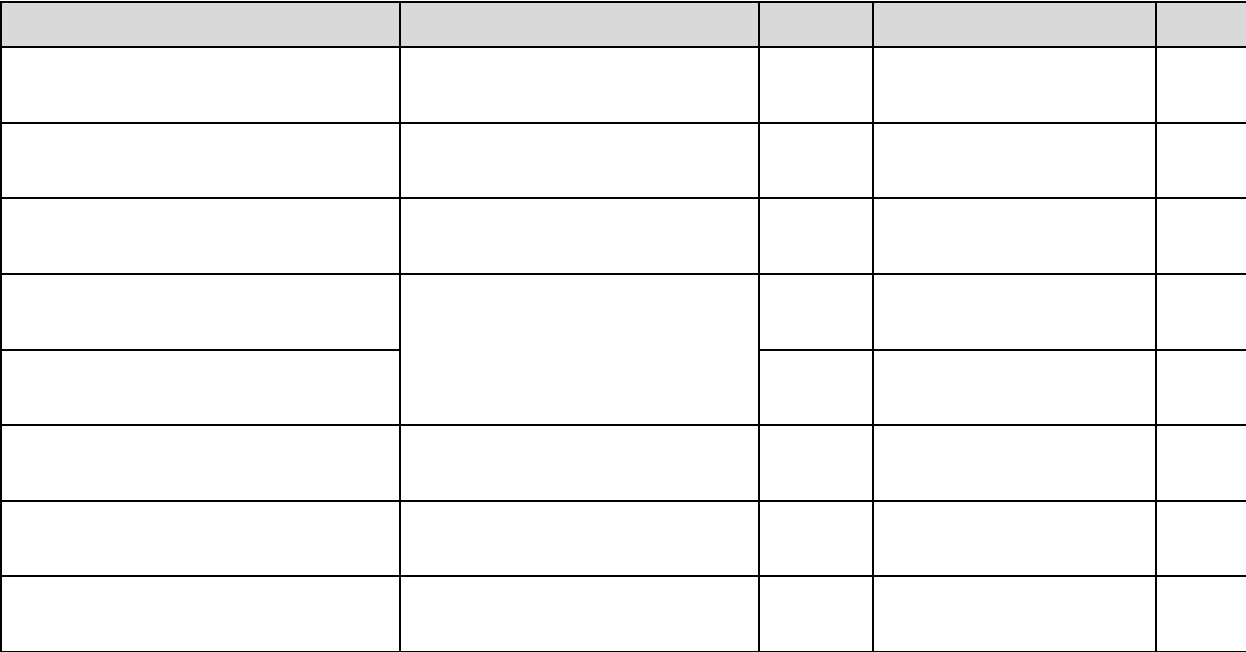

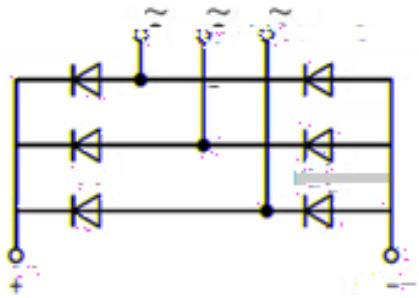

!



!

FIG.1: Forward characteristics(per diode)


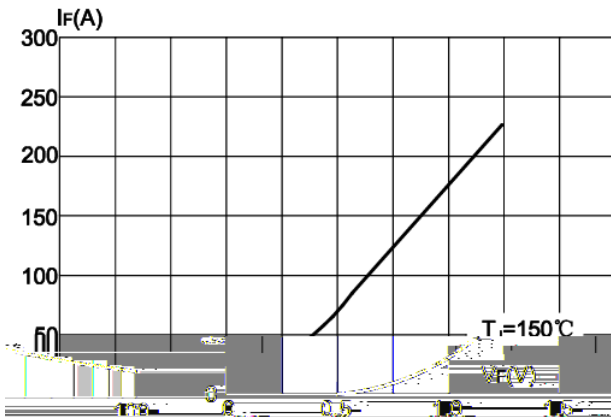


FIG.2: Peak on-state surge current

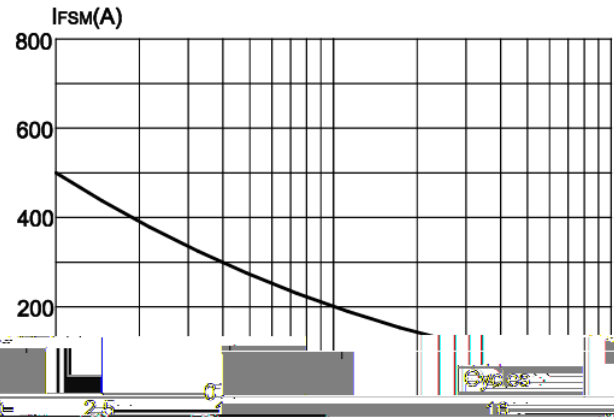

Thermal Impedance (per diode)

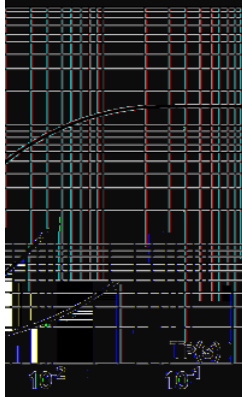


FIG.3: Forward current vs. case temperature

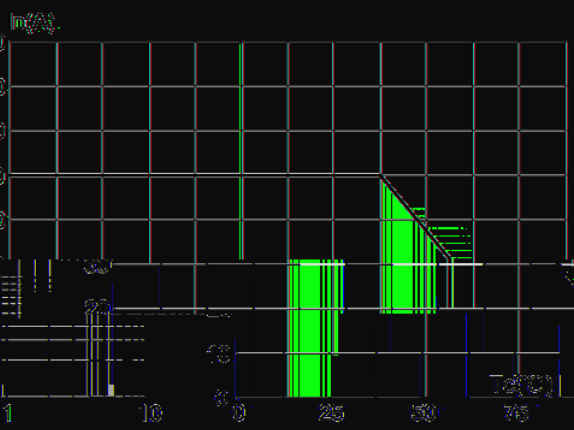


FIG.4: Maximum transient thermal impedance (Zthmax) vs. Pulse width (t) for a single diode

