FIG.1: Forward characteristics(per diode)

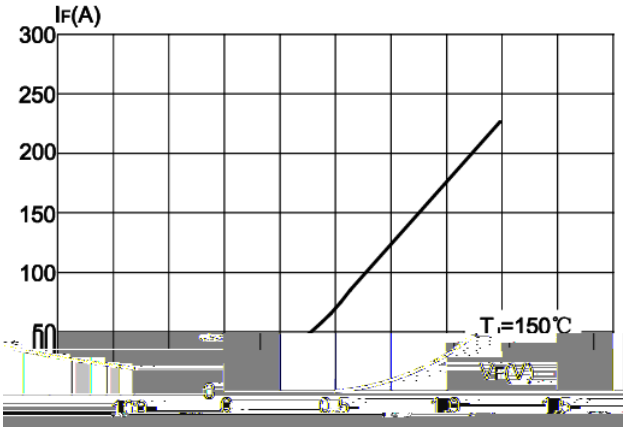

FIG.2: Peak on-state surge current

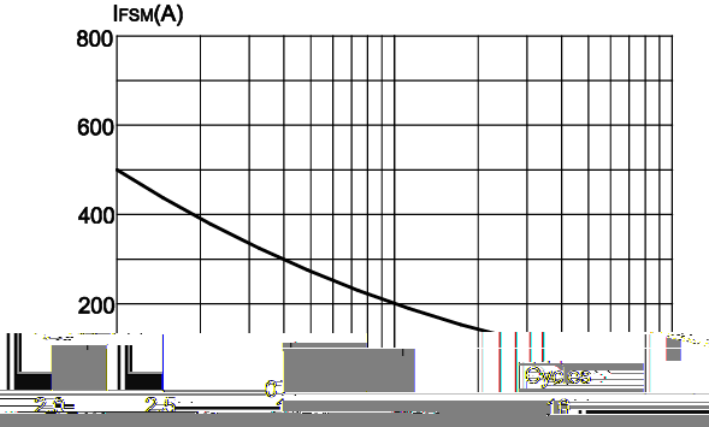

m transient thermal impedance
ction-to-case(per diode)

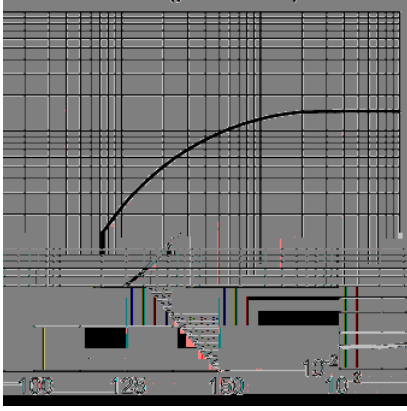

FIG.3: Forward current vs. case temperature

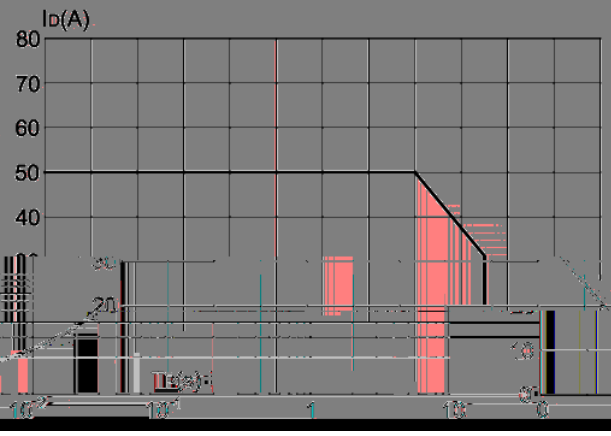

FIG.4: Maximu

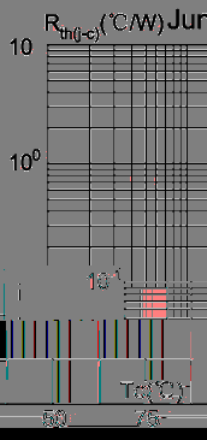

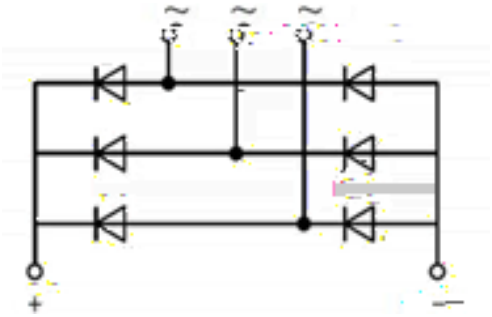

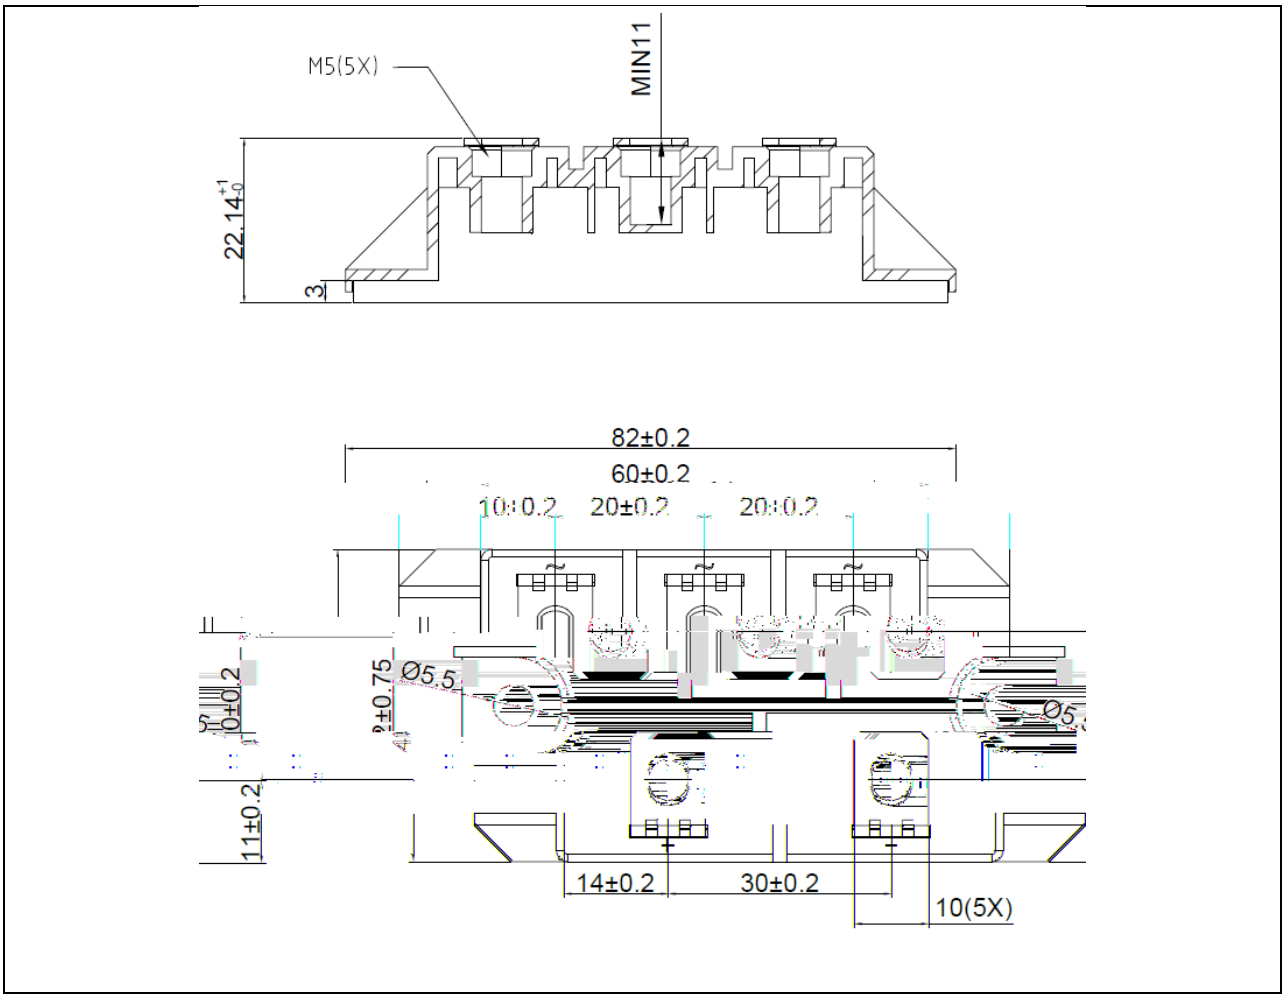
M5(5X)
MIN11
22.14+1 -0
3
82±0.2
60±0.2
10±0.2
20±0.2
20±0.2
Ø5.5
Ø5.5
11±0.2
14±0.2
30±0.2
10(5X)