





°C		



	°C			

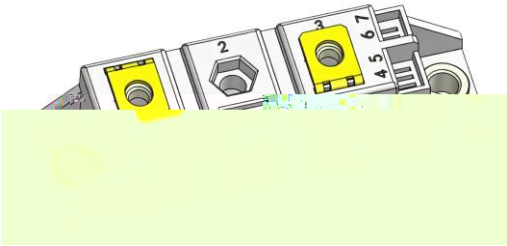

		°C				
		°C				
		°C				
						Ω



FIG.1: Forward characteristics(per diode)

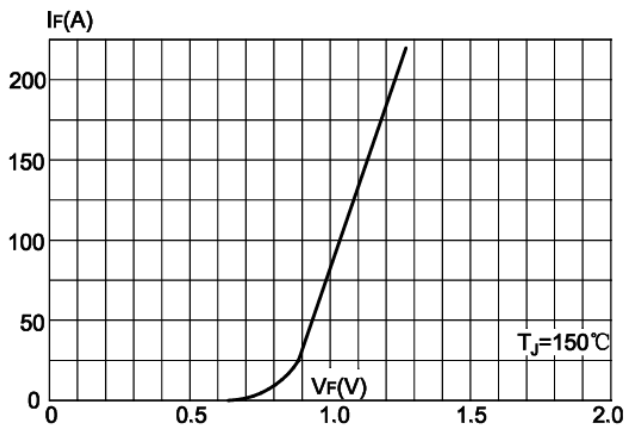


FIG.2: Peak on-state surge current

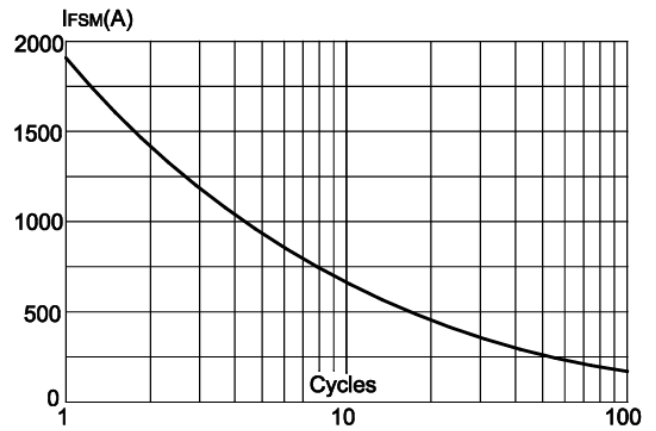


FIG.3: Forward current vs. case temperature


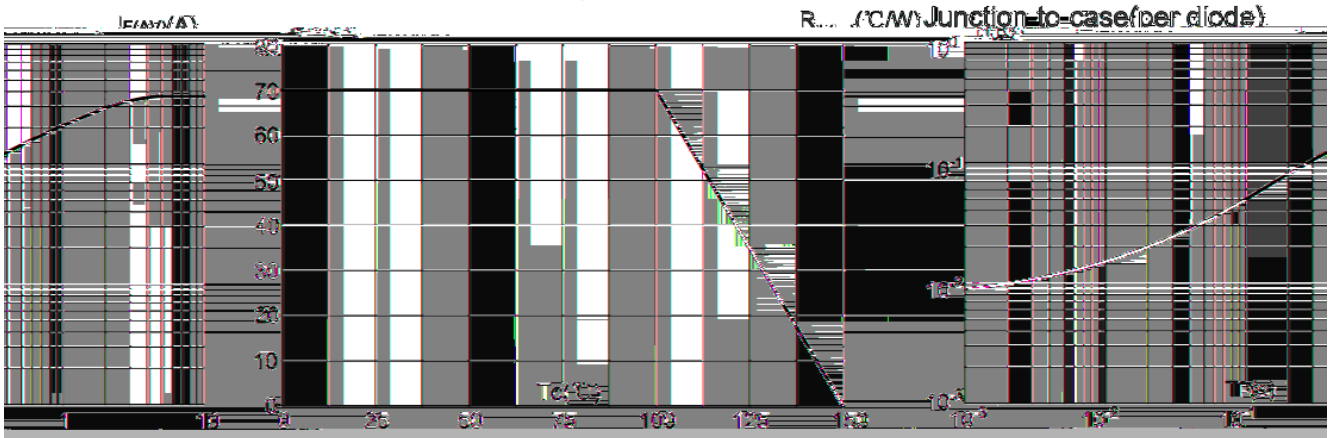


FIG.4: Maximum transient thermal impedance

R_{JA} ($^\circ\text{C/W}$) Junction-to-case(per diode)



A视图

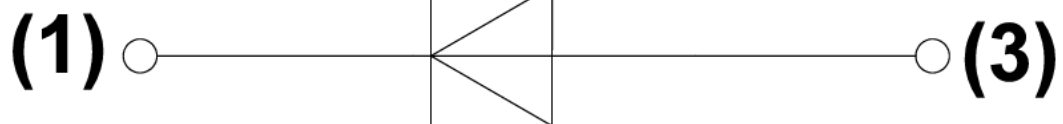