



°C



	°C					
	°C					
	°C					
						Ω



FIG.1: Forward characteristics(per diode)

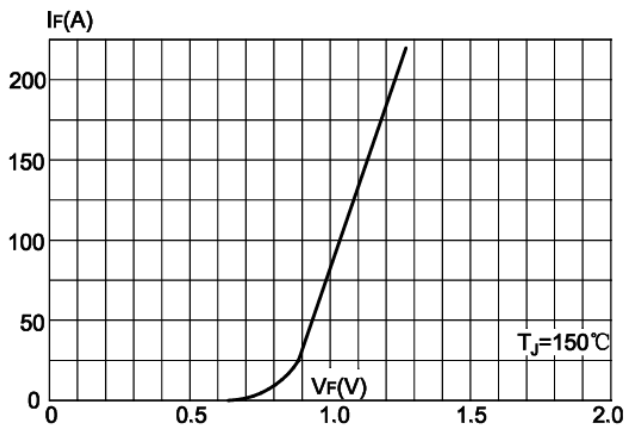


FIG.2: Peak on-state surge current

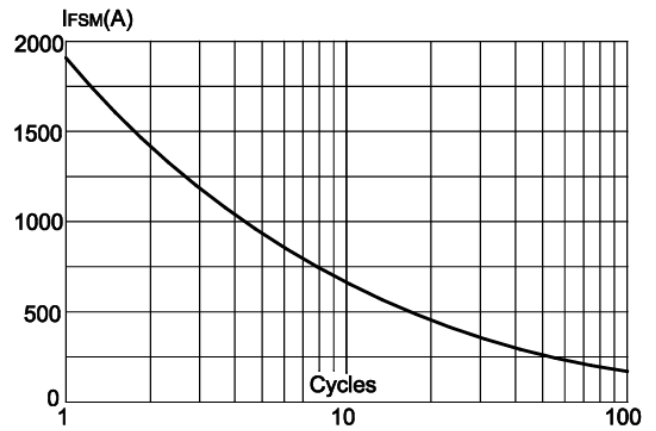


FIG 3: Forward current vs. case temperature



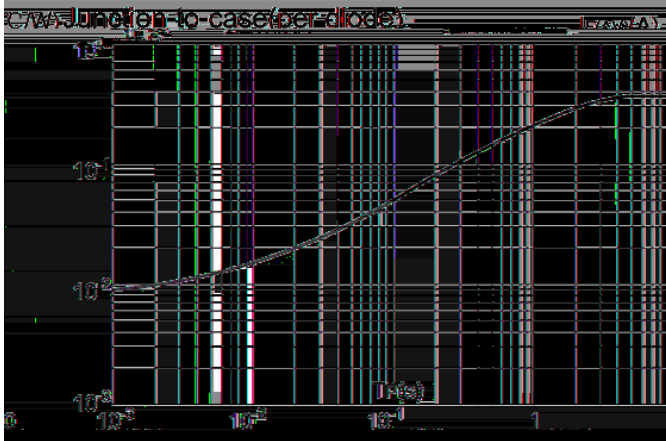


FIG.4: Maximum transient thermal impedance

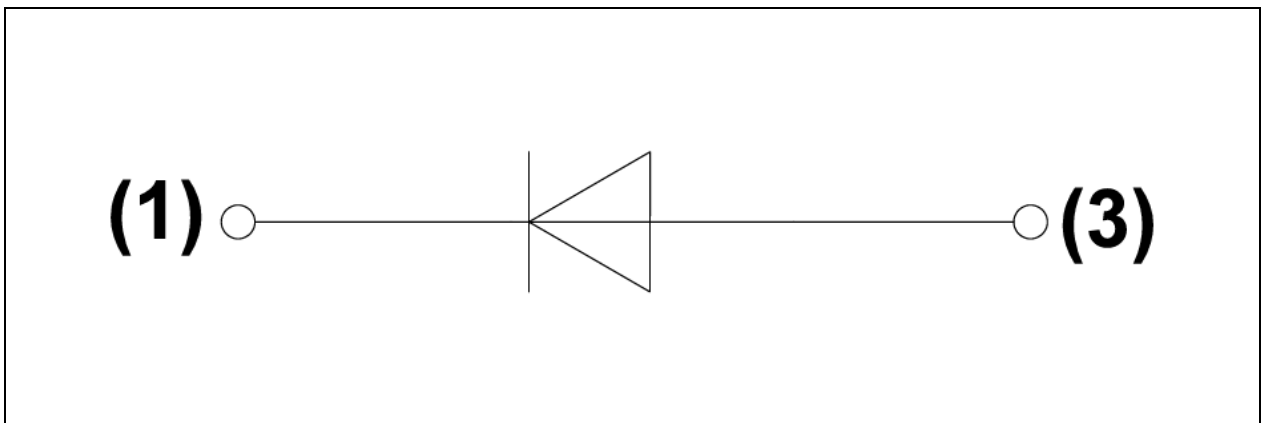

A视图

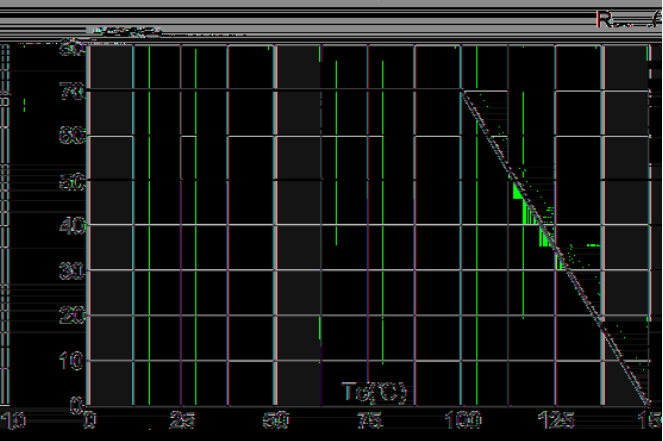