




3

1

4 00		4
4	6	
1		
4		4
2 2		

3

3



2

0	2	4 00		4
	2	4		
	2			
	1 1	1		
4	2(°C, per diode			
(		2(		
1		2		°C



2						
	2	4				4
	2					
	4 ₀ 4 ₀₀ 2	00				
	4 ₀ 4 ₀₀ 2					

FIG.1: Forward voltage drop vs forward current

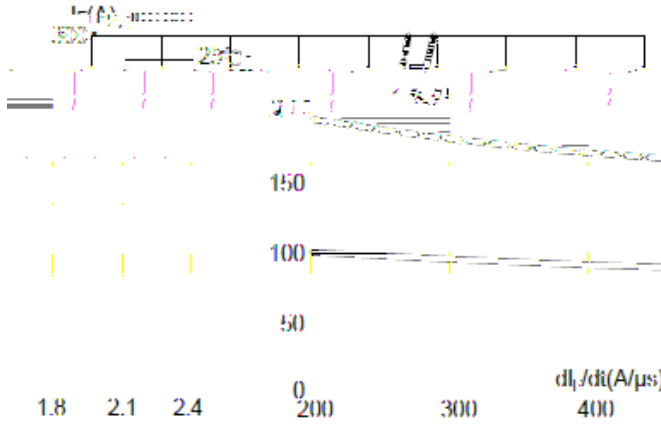


FIG.2: Reverse recovery time vs di_F/dt

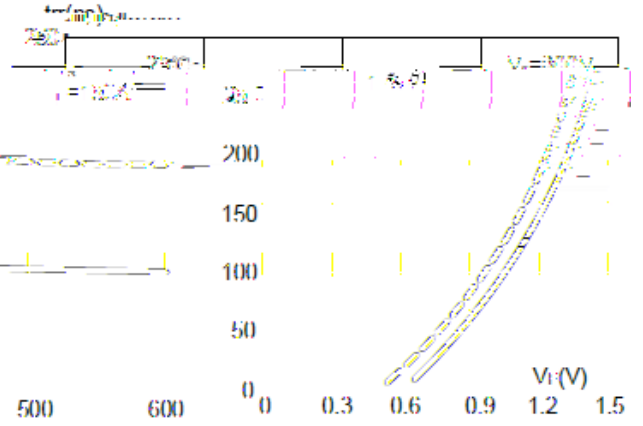


FIG.3: Reverse recovery current vs di_F/dt

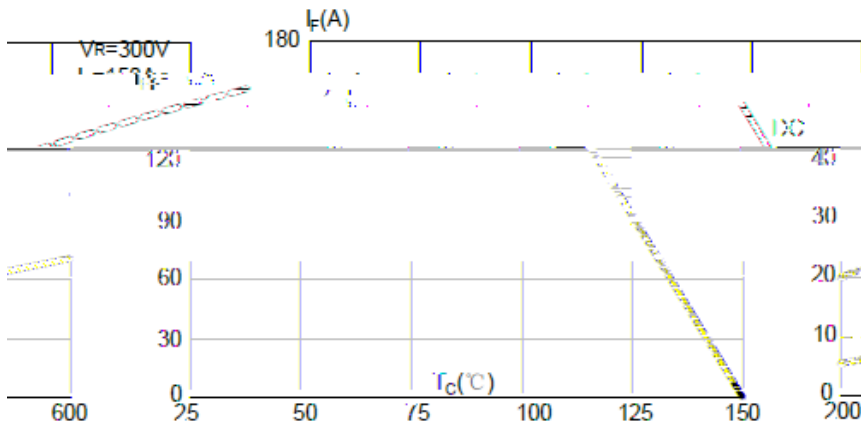


FIG.4: Forward current vs case temperature

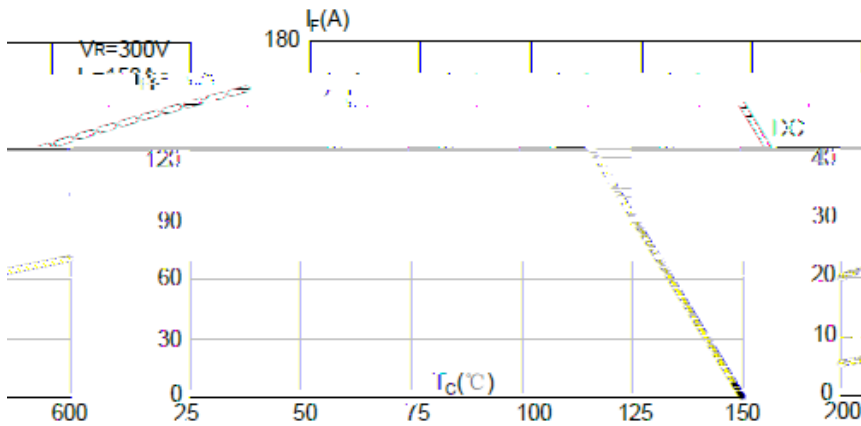


FIG.5: Reverse recovery curve

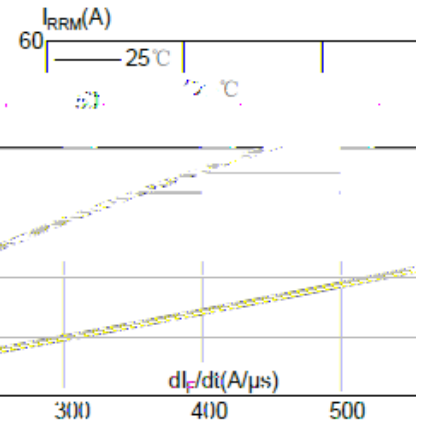


FIG.6: Maximum transient thermal impedance



