




°C		



				°C
				°C

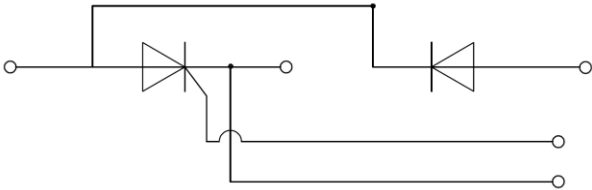

	°C					
	°C					
	°C					
	°C					
	°C					
	°C					
	°C					

FIG.1: Power dissipation vs. on-state current (per thyristor or diode)

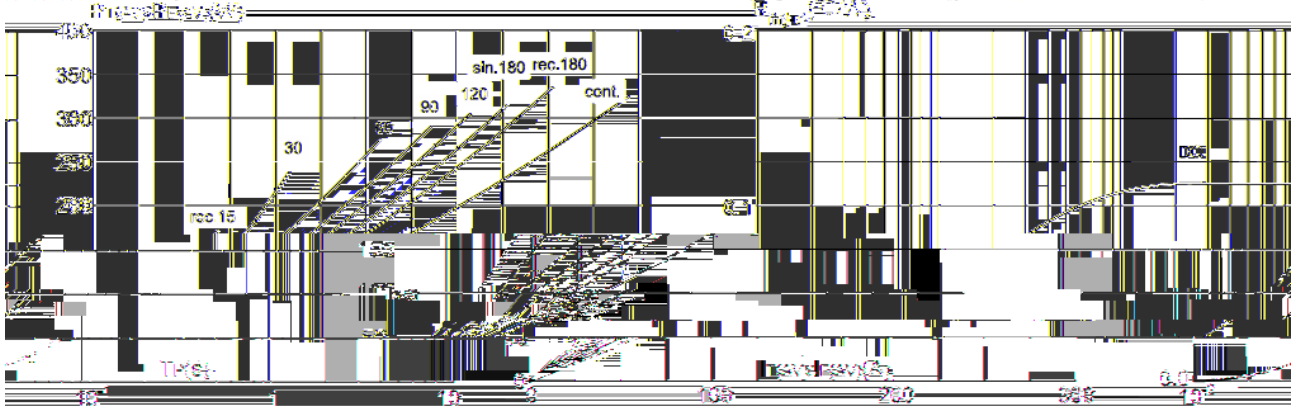


FIG.2: Maximum transient thermal impedance junction to case(per thyristor or diode)

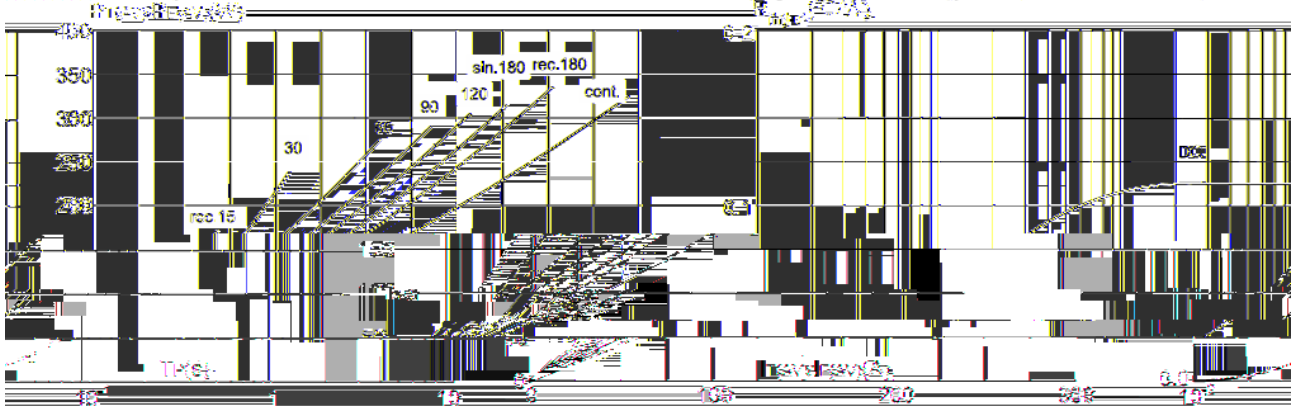


FIG.3: Forward characteristics (per thyristor or diode)

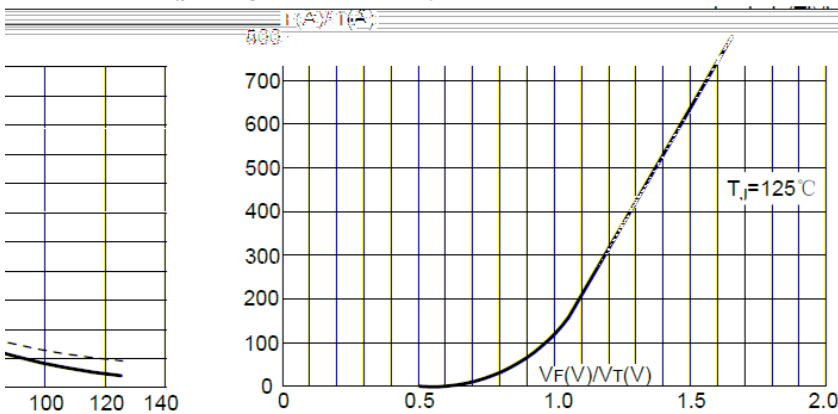


FIG.4: Relative variations of gate trigger current, holding current and latching current versus junction temperature

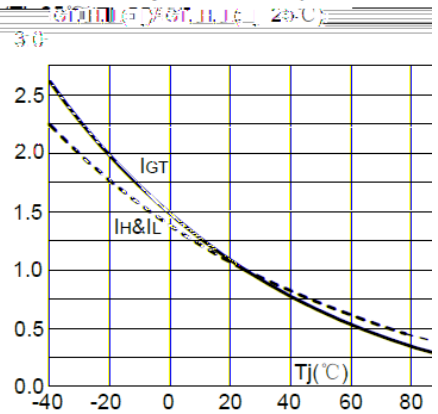


FIG.5: Gate trigger characteristics

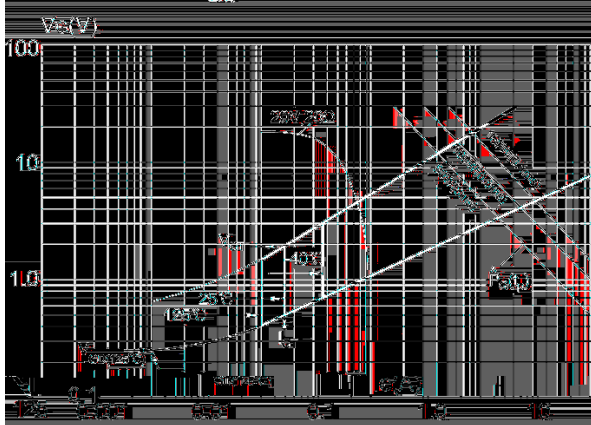


FIG.6: Forward current vs. case temperature (per thyristor or diode)



