



JMT60KT18T1AC

Features

Product Summary

Applications

Absolute Maximum Ratings



Parameter	Conditions	Symbol	Values	Unit
	°C			
				°C



Electrical Characteristics

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	
	°C					
	°C					
	°C					
	°C					
	°C					
	°C					
	°C					
	°C					

Thermal Characteristics





Ordering Information

Device	Marking	Package	Weight	Inner Box	Per Carton

Typical Electrical & Thermal Characteristics

FIG.1: Power dissipation vs. on-state current
(per thyristor or diode)






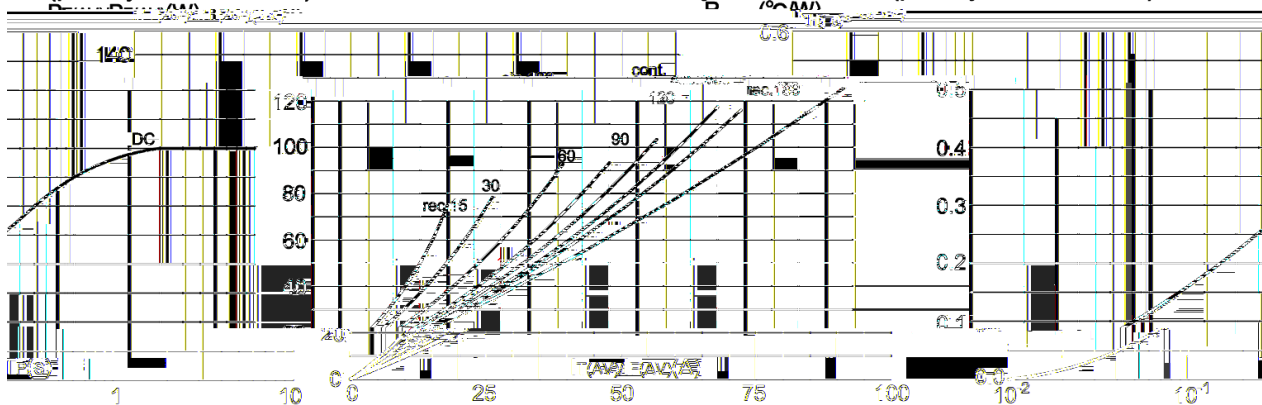


FIG.2: Maximum transient thermal impedance
junction to case(per thyristor or diode)

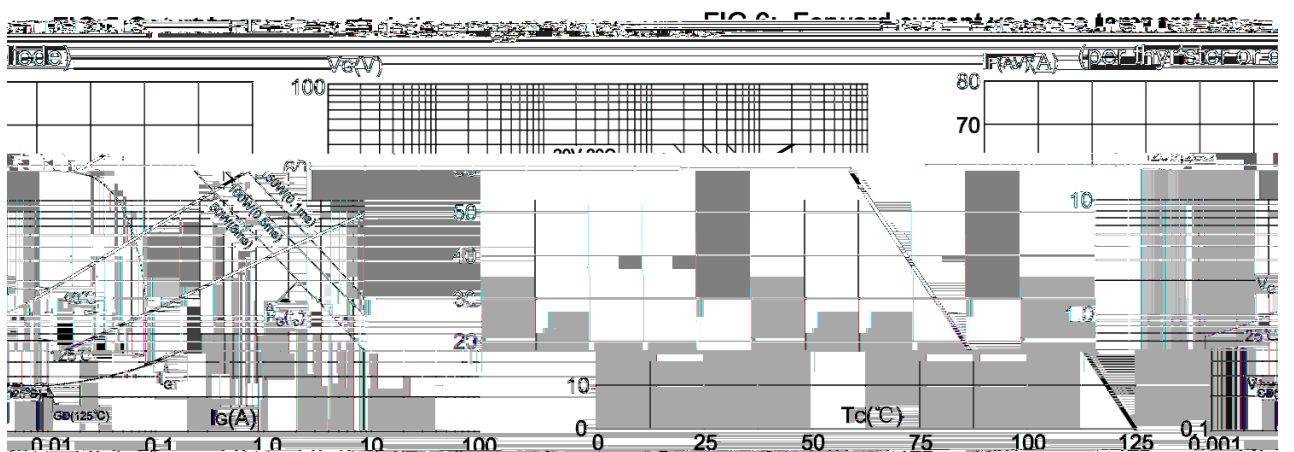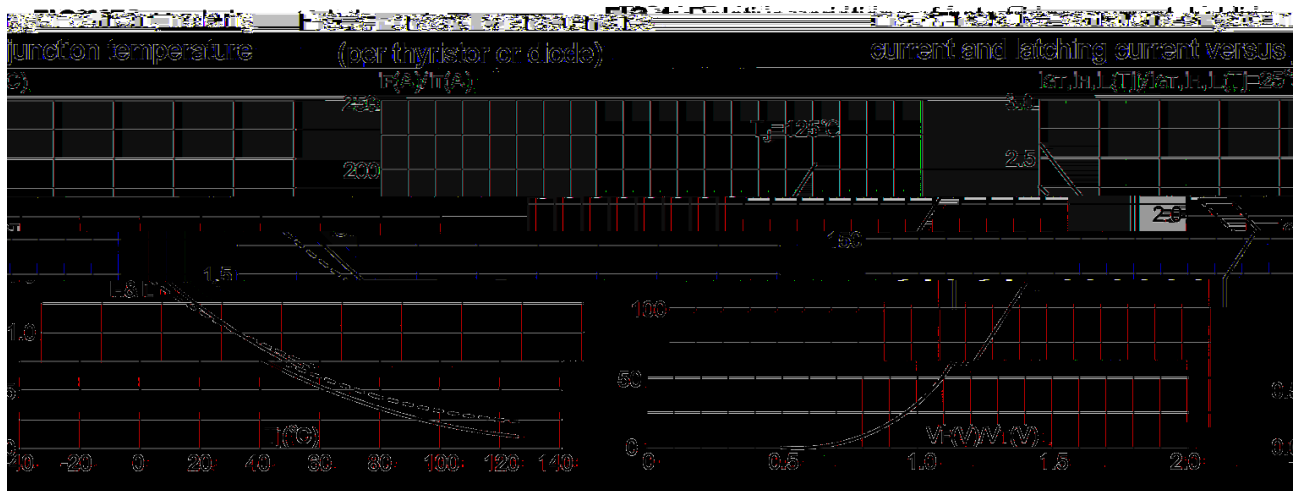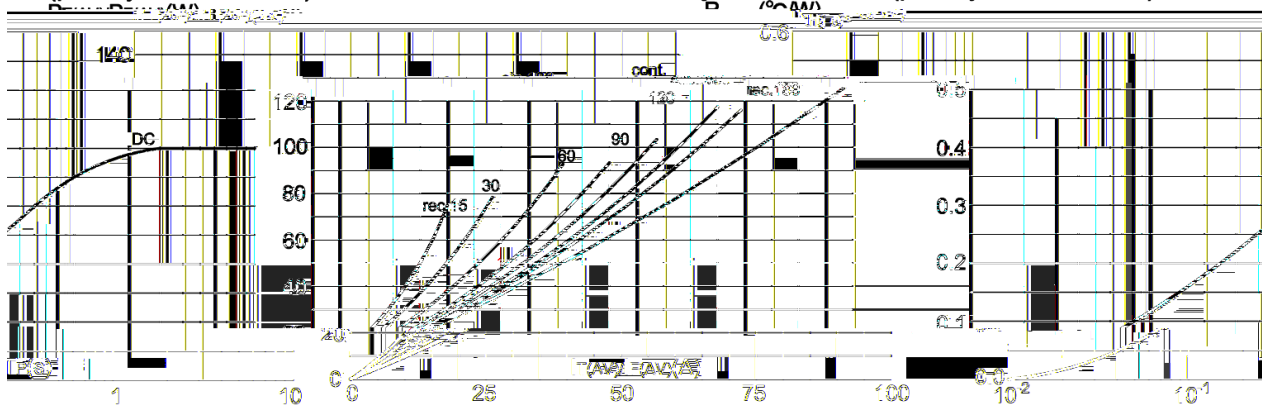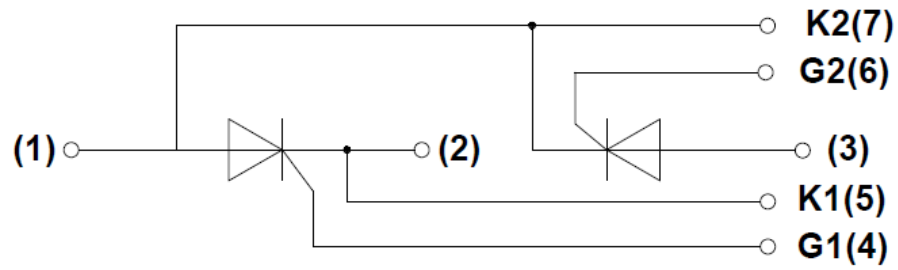

Circuit Diagram

Package Outlines (mm)

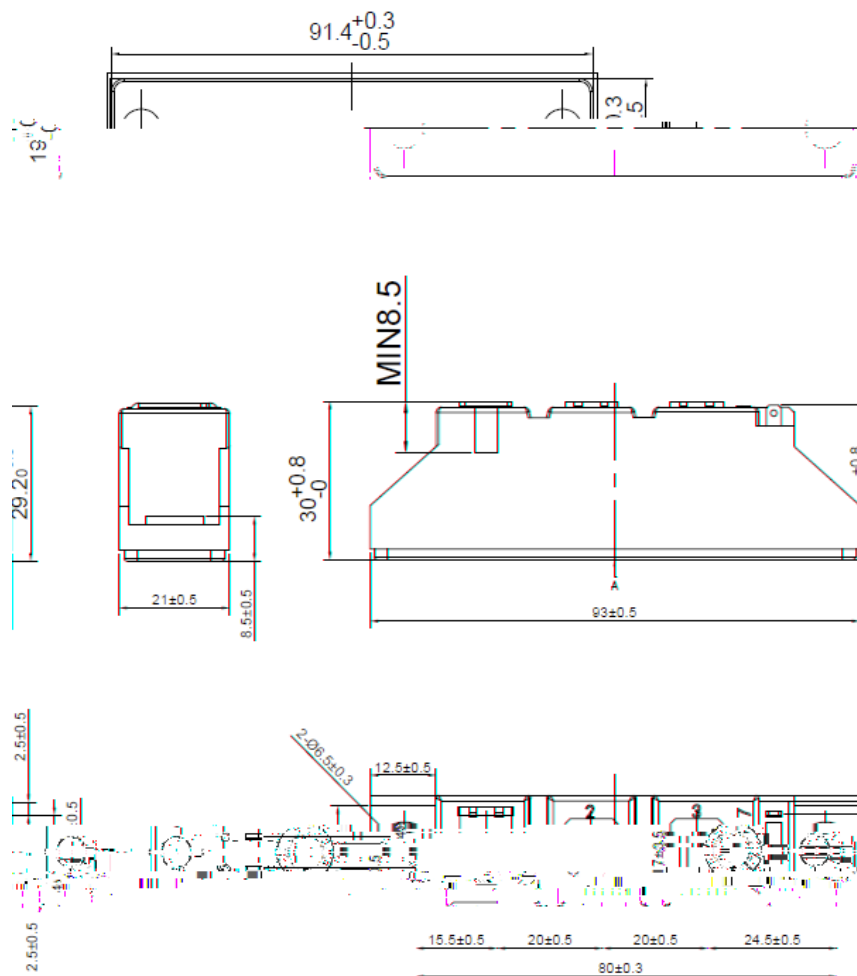


JMT60KT18T1AC