




°C		



	°C			
				°C
				°C

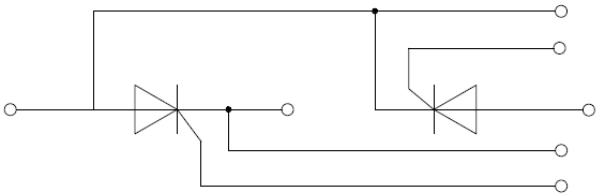

	°C					
	°C					
	°C					
	°C					
	°C					
	°C					
	°C					
	°C					



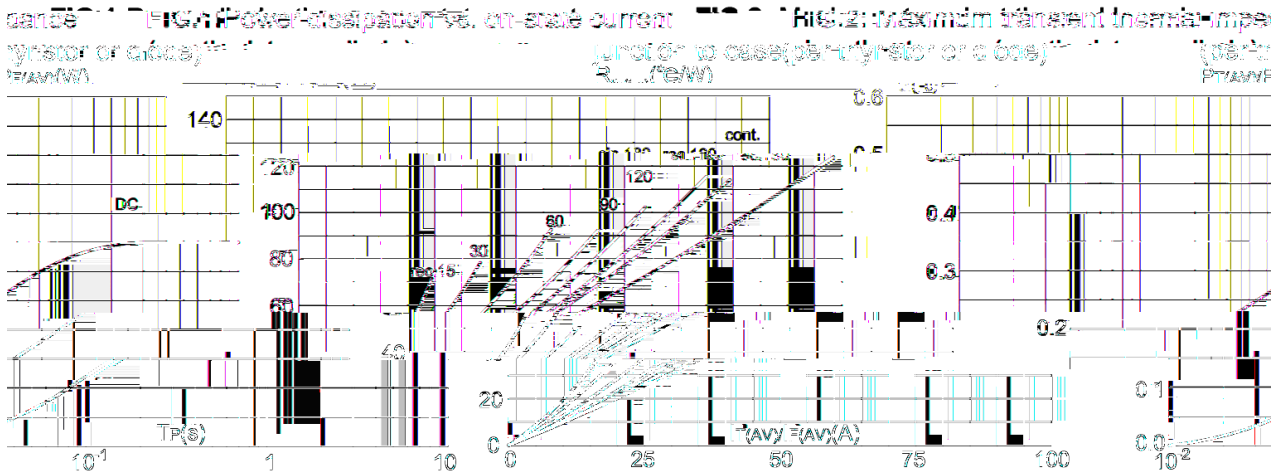


FIG.3: Forward characteristics

FIG.4: Relative variations of gate trigger current - holding

at a constant temperature (for the device or diode)

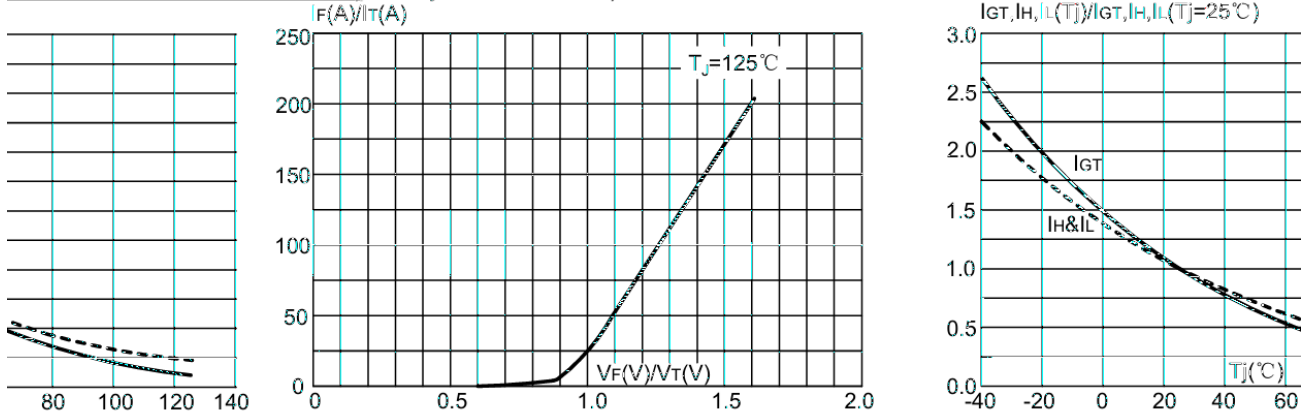


FIG.5: Gate trigger characteristics

FIG.6: Forward current vs. case temperature

