




°C		



	°C			
				°C
				°C

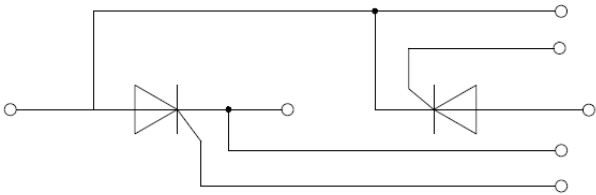

	°C					
	°C					
	°C					
	°C					

°C



FIG.1: Power dissipation vs. on-state current

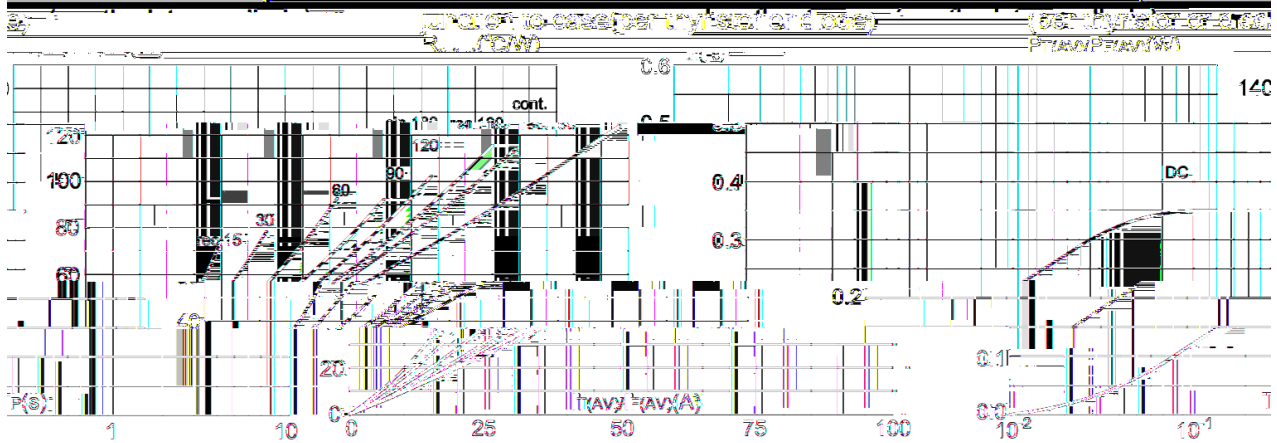


FIG.2: Maximum transient thermal impedance

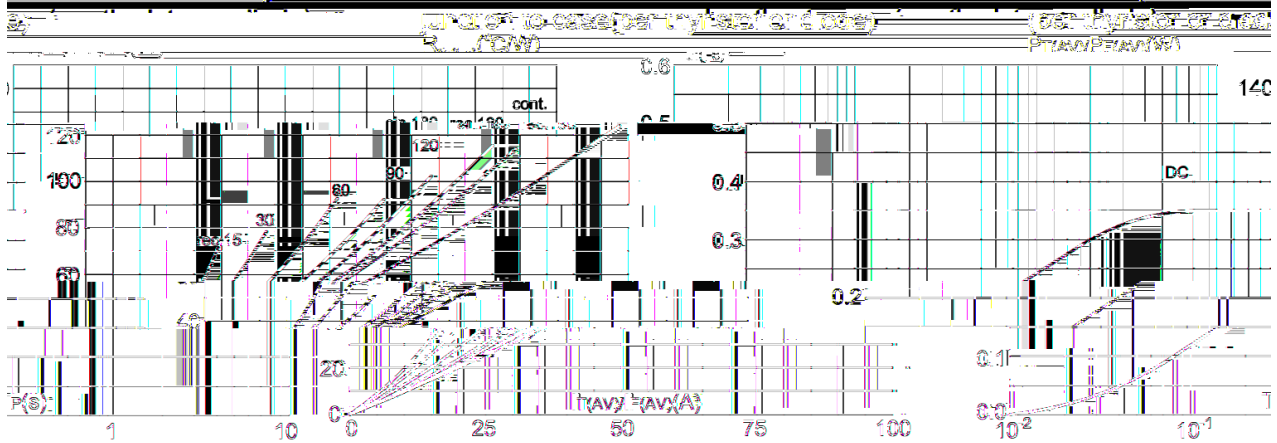


FIG.3: Forward characteristics

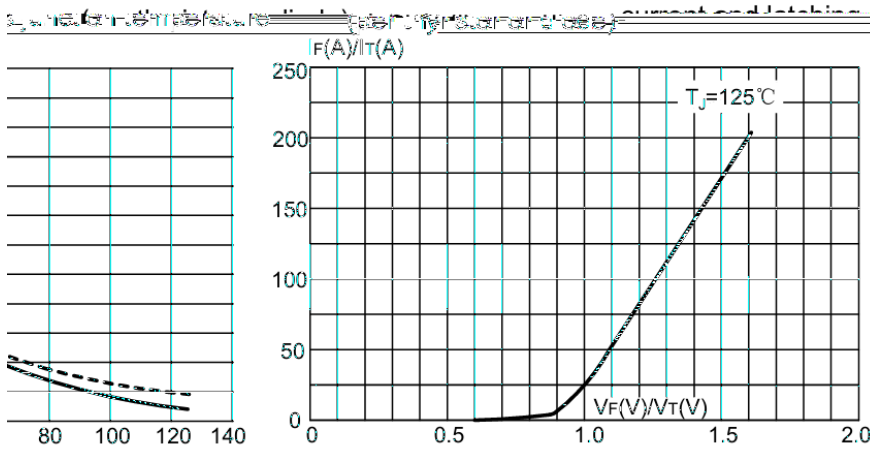


FIG.4: Relative variations of gate trigger current, holding current and latching current vs. temperature

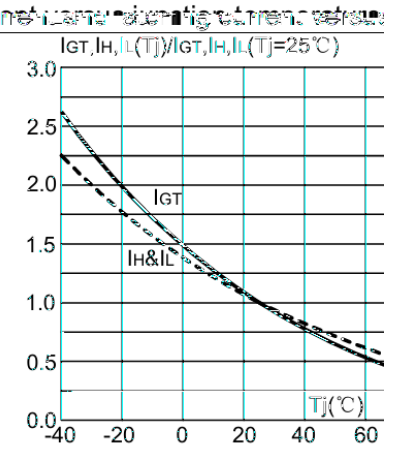


FIG.5 Gate trigger characteristics

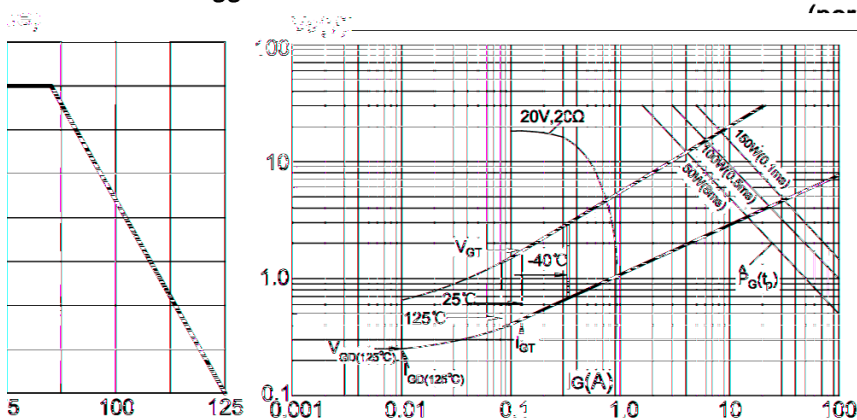


FIG.6: Forward current vs. case temperature

